

1

2

3

A



B

C

D


E

F



DISPLAY POWER BOARD DETAILS

FOR FURTHER DETAILS PLEASE REFER TO THE HEATED INSTALLATION DETAILS

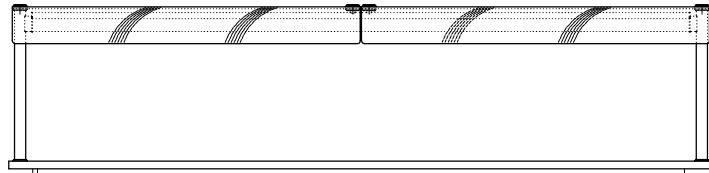

FRONT ELEVATION

A

B

C

D

E

F

THE AMBIENT TEMPERATURE MUST NOT EXCEED 55°C IN THE VOID AREA INDICATED.

Customer Side

2330 DISPLAY SIZE

660 DISPLAY SIZE

650 MIN. SUBSTRATE CUT-OUT

2180 MIN. SUBSTRATE CUT-OUT



Operator Side

PLAN VIEW

NOTE: IF DISPLAY IS TO BE FLUSH MOUNTED INTO WORKTOP, ADD 4 - 6mm TO DISPLAY SIZES FOR WORKTOP CUT-OUT

L.H. END ELEVATION


Customer Side

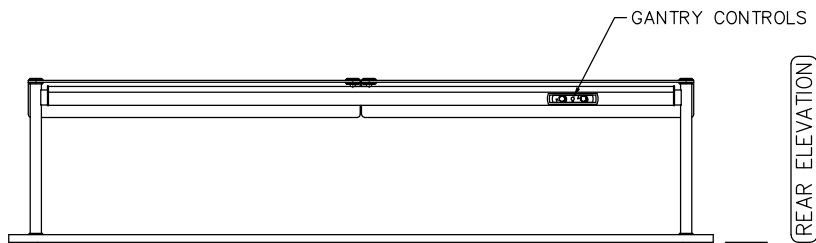

REAR ELEVATION

INDICATES ACCESSIBLE SERVICE VOID REQUIRED WITHIN COUNTERBODY

RECOMMENDED POWER BOARD POSITION



PRODUCT RANGE: idesign
DESC.: 6-1Gn SELF HELP CERAMIC GLASS HOTPLATE

OPTION:

ID CODE: IHCGH6-GO

OPTION CODE:

counterline

RANDES RD, KNOWSLEY BUSINESS PARK, MERSEYSIDE L34 9HZ.

Tel: 0151 548 2211

Fax: 0151 549 2179

ELECTRICAL INFO: 16A, 230V, 3.6KW

WEIGHT: 75Kg

ISSUE: 1



SCALE: 1:25 @ A4

1

2