



counterline 
setting the standard



vision aire

part of the i design range

contents

	contents & introduction	02
	Introduction to the vision aire range	
	new designs	03
	New range of units with hydraulic gas assisted hinges.	
	heated • free standing	04-05
	Heated self help and assisted units.	
	heated • free standing	06-07
	Heated self help and assisted units with gas assisted hinges.	
	heated • drop-in	08-09
	Heated self help and assisted drop-in units.	
	chilled • free standing	10-11
	Chilled self help and assisted units.	
	chilled • free standing	12-13
	Chilled self help and assisted units with gas assisted hinges.	
	chilled • drop-in	14-15
	Chilled self help drop-in presentation.	
	chilled • drop-in	16-17
	Chilled self help and assisted drop-in units.	
	ambient • free standing	18-19
	Ambient self help and assisted drop-in units.	
	ambient • free standing	20-21
	Ambient self help and assisted units with gas assisted hinges.	
	ambient • drop-in	22-23
	Ambient self help and assisted drop-in units.	
	vision aire • case studies	24-25
	Examples of vision aire projects	
	vision aire • case study	26
	Example of vision aire project	
	options • specifications	27
	Options & Technical Specifications	

Looking for a range of food display units that is sure to catch the eye? Set your sights on **vision aire**.

vision aire offers a revolutionary range of free-standing, drop-in and countertop food displays.

vision aire units follow the same attractive profile, which means that any mix of heated, chilled and ambient units can be combined together to form a continuous counter run.

vision aire displays are designed to either stand alone with decorative fascia finishes, be dropped into a counter, be placed on a countertop, or be positioned behind a shop-fitted fascia.

vision aire lets you present most food or drink perfectly while maintaining the correct temperature. Combine this with low running costs and **vision aire** displays are ideal for hotels, restaurants, high street cafés, coffee shops and convenience stores.

- Forms a continuous counter run of displays if required.
- LED illumination to all shelf levels.
- Chilled and heated free-standing and drop-in displays operated by new energy saving electronic controllers.
- Choose square or curved glass from all free-standing and drop-in displays.
- Available with open and closed fronts, with either rear doors or solid back option.
- New range of units with front glass panel 'lift up' access fitted with gas assisted hinge mechanisms for easy stocking and cleaning.

 heated display
  chilled display
  ambient display
  13 amp (plug & play)
  eco friendly
  fan assisted

icon guide



Designed to provide exceptional ease of use for stocking and cleaning, our new range of **vision aire** units now provide you with the option of choosing a model equipped with hydraulic gas assisted hinges.

Quality, style and simplicity combined.



Models illustrated:
SVCL600-GO, SVCL900-GO and SVCL1200-GO



open fronted **heated** self help



- Open fronted display maintains pre-heated cooked food at a regulated temperature.
- Ideal for hot rolls, pies, pasties, chicken portions etc.
- Illumination to all shelf levels.
- Castors included as standard which give an overall height of 1465mm.
- Adjustable low level feet reducing overall height to 1400mm available as an optional extra.
- Produce displayed on bright polished stainless steel wire racks.
- Shelf covers are removable for cleaning.
- Digital temperature panel allowing control settings for each individual shelf panel.
- Electronic controller installed on operators side (GO) with rear doors.
- The electric controller can be installed on customer side (GC) with fixed back.

Image: VOHF900-GO



Image: SVOHF900-GO



Stock Code	Overall Size mm	Weight kg	Wattage kw
VOHF600-GO	600(w) x 750(d) x 1465(h)	110	3.0
VOHF900-GO	900(w) x 750(d) x 1465(h)	159	3.0
VOHF1200-GO	1200(w) x 750(d) x 1465(h)	200	3.0
VOHF600-GC	600(w) x 750(d) x 1465(h)	110	3.0
VOHF900-GC	900(w) x 750(d) x 1465(h)	159	3.0
VOHF1200-GC	1200(w) x 750(d) x 1465(h)	200	3.0

Stock Code	Overall Size mm	Weight kg	Wattage kw
SVOHF600-GO	600(w) x 750(d) x 1470(h)	110	3.0
SVOHF900-GO	900(w) x 750(d) x 1470(h)	159	3.0
SVOHF1200-GO	1200(w) x 750(d) x 1470(h)	200	3.0
SVOHF600-GC	600(w) x 750(d) x 1470(h)	110	3.0
SVOHF900-GC	900(w) x 750(d) x 1470(h)	159	3.0
SVOHF1200-GC	1200(w) x 750(d) x 1470(h)	200	3.0

vision aire • heated • free standing

enclosed **heated** assisted service



- Fully enclosed display maintains pre-heated cooked food at a regulated temperature.
- Ideal for hot rolls, pies, pasties, chicken portions etc.
- Illumination to all shelf levels.
- Castors included as standard which give an overall height of 1465mm.
- Adjustable low level feet reducing overall height to 1400mm available as an optional extra.
- Produce displayed on bright polished stainless steel wire racks.
- Shelf covers are removable for cleaning.
- Digital temperature panel allowing control settings for each individual shelf panel.
- Electronic controller installed on operators side (GO) with rear doors.

Image: VHF900-GO



Image: SVHF900-GO



Stock Code	Overall Size	Weight	Wattage
	mm	kg	kw
VHF600-GO	600(w) x 750(d) x 1465(h)	116	3.0
VHF900-GO	900(w) x 750(d) x 1465(h)	165	3.0
VHF1200-GO	1200(w) x 750(d) x 1465(h)	206	3.0

Stock Code	Overall Size	Weight	Wattage
	mm	kg	kw
SVHF600-GO	600(w) x 750(d) x 1470(h)	122	3.0
SVHF900-GO	900(w) x 750(d) x 1470(h)	173	3.0
SVHF1200-GO	1200(w) x 750(d) x 1470(h)	216	3.0



enclosed **heated** assisted service



- Fully enclosed display maintains pre-heated cooked food at a regulated temperature.
- Ideal for hot rolls, pies, pasties, chicken portions etc.
- Illumination to all shelf levels.
- Castors included as standard which give an overall height of 1465mm.
- Adjustable low level feet reducing overall height to 1400mm available as an optional extra.
- Produce displayed on bright polished stainless steel wire racks.
- Shelf covers are removable for cleaning.
- Digital temperature panel allowing control settings for each individual shelf panel.
- Electronic controller installed on operators side (GO) with rear doors.

hydraulic gas assisted hinge models

Image: VHFL900-GO



Image: SVHFL900-GO



Stock Code	Overall Size mm	Weight kg	Wattage kw
VHFL600-GO	600(w) x 750(d) x 1465(h)	116	3.0
VHFL900-GO	900(w) x 750(d) x 1465(h)	165	3.0
VHFL1200-GO	1200(w) x 750(d) x 1465(h)	206	3.0

Stock Code	Overall Size mm	Weight kg	Wattage kw
SVHFL600-GO	600(w) x 750(d) x 1470(h)	122	3.0
SVHFL900-GO	900(w) x 750(d) x 1470(h)	173	3.0
SVHFL1200-GO	1200(w) x 750(d) x 1470(h)	216	3.0

vision aire • heated • free standing



*hydraulic gas
assisted hinges*



Image: SVHFL1200-GO



open fronted **heated** self help



- Open fronted display maintains pre-heated cooked food at a regulated temperature.
- Ideal for hot rolls, pies, pasties, chicken portions etc.
- Two shelves and a base with illumination to all shelf levels.
- Fixed back (GC) as standard, rear doors (GO) optional.
- Produce displayed on bright polished stainless steel shelf covers.
- Shelf covers are removable for cleaning.
- Digital temperature panel allowing control settings for each individual shelf panel.
- Eye level electronic controller installed on operators side (GO) with rear doors.
- The electric controller can be installed on customer side (GC) with fixed back.

Image: VOHFDI900-GO



Image: SVOHFDI900-GO



Stock Code	Overall Size mm	Weight kg	Wattage kw
VOHFDI600-GO	600(w) x 750(d) x 826(h)	70	3.0
VOHFDI900-GO	900(w) x 750(d) x 826(h)	84	3.0
VOHFDI1200-GO	1200(w) x 750(d) x 826(h)	108	3.0
VOHFDI600-GC	600(w) x 750(d) x 826(h)	70	3.0
VOHFDI900-GC	900(w) x 750(d) x 826(h)	84	3.0
VOHFDI1200-GC	1200(w) x 750(d) x 826(h)	108	3.0

Stock Code	Overall Size mm	Weight kg	Wattage kw
SVOHFDI600-GO	600(w) x 750(d) x 834(h)	76	3.0
SVOHFDI900-GO	900(w) x 750(d) x 834(h)	92	3.0
SVOHFDI1200-GO	1200(w) x 750(d) x 834(h)	118	3.0
SVOHFDI600-GC	600(w) x 750(d) x 834(h)	76	3.0
SVOHFDI900-GC	900(w) x 750(d) x 834(h)	92	3.0
SVOHFDI1200-GC	1200(w) x 750(d) x 834(h)	118	3.0

vision aire • heated • drop-ins

enclosed **heated** assisted service



- Fully enclosed display maintains pre-heated cooked food at a regulated temperature.
- Ideal for hot rolls, pies, pasties, chicken portions etc.
- Two shelves and a base with illumination to all shelf levels.
- Produce displayed on bright polished stainless steel shelf covers.
- Shelf covers are removable for cleaning.
- Digital temperature panel allowing control settings for each individual shelf panel.
- Electronic controller installed on operators side (GO) as standard.

Image: VHFDI900-GO



Image: SVHFDI900-GO



Stock Code	Overall Size	Weight	Wattage
	mm	kg	kw
VHFDI600-GO	600(w) x 750(d) x 826(h)	73	3.0
VHFDI900-GO	900(w) x 750(d) x 826(h)	87	3.0
VHFDI1200-GO	1200(w) x 750(d) x 826(h)	111	3.0

Stock Code	Overall Size	Weight	Wattage
	mm	kg	kw
SVHFDI600-GO	600(w) x 750(d) x 834(h)	79	3.0
SVHFDI900-GO	900(w) x 750(d) x 834(h)	95	3.0
SVHFDI1200-GO	1200(w) x 750(d) x 834(h)	121	3.0



open fronted chilled self help



- Open fronted display maintains food at a regulated temperature.
- Ideal for sandwiches, filled rolls, dairy products, drinks etc.
- Three glass shelves with LED illumination to all shelf levels.
- Castors included as standard which give an overall height of 1465mm.
- Adjustable low level feet reducing overall height to 1400mm available as an optional extra.
- Integral fan blown refrigeration system.
- Eye level electronic controller installed on operators side (GO) with rear doors.
- The electric controller can be installed on customer side (GC) with fixed back.

Image: VOC900-GO



Stock Code	Overall Size mm	Weight kg	Wattage kw
VOC600-GO	600(w) x 750(d) x 1465(h)	135	1.5
VOC900-GO	900(w) x 750(d) x 1465(h)	180	2.3
VOC1200-GO	1200(w) x 750(d) x 1465(h)	230	2.3
VOC1500-GO	1500(w) x 750(d) x 1465(h)	280	2.5
VOC1800-GO	1800(w) x 750(d) x 1465(h)	330	2.8
VOC2100-GO	2100(w) x 750(d) x 1465(h)	380	2.8
VOC600-GC	600(w) x 750(d) x 1465(h)	135	1.5
VOC900-GC	900(w) x 750(d) x 1465(h)	180	2.3
VOC1200-GC	1200(w) x 750(d) x 1465(h)	230	2.3
VOC1500-GC	1500(w) x 770(d) x 1465(h)	280	2.5
VOC1800-GC	1800(w) x 770(d) x 1465(h)	330	2.8
VOC2100-GC	2100(w) x 770(d) x 1465(h)	380	2.8

Image: SVOC900-GO



Stock Code	Overall Size mm	Weight kg	Wattage kw
SVOC600-GO	600(w) x 750(d) x 1470(h)	141	1.5
SVOC900-GO	900(w) x 750(d) x 1470(h)	188	2.3
SVOC1200-GO	1200(w) x 750(d) x 1470(h)	240	2.3
SVOC1500-GO	1500(w) x 750(d) x 1470(h)	294	2.5
SVOC1800-GO	1800(w) x 750(d) x 1470(h)	346	2.8
SVOC2100-GO	2100(w) x 750(d) x 1470(h)	398	2.8
SVOC600-GC	600(w) x 750(d) x 1470(h)	141	1.5
SVOC900-GC	900(w) x 750(d) x 1470(h)	188	2.3
SVOC1200-GC	1200(w) x 750(d) x 1470(h)	240	2.3
SVOC1500-GC	1500(w) x 770(d) x 1470(h)	294	2.5
SVOC1800-GC	1800(w) x 770(d) x 1470(h)	346	2.8
SVOC2100-GC	2100(w) x 770(d) x 1470(h)	398	2.8

vision aire • chilled • free standing

enclosed chilled assisted service



- Fully enclosed display maintains food at a regulated temperature.
- Ideal for sandwiches, filled rolls, dairy products, drinks etc.
- Three glass shelves with LED illumination to all shelf levels.
- Castors included as standard which give an overall height of 1465mm.
- Adjustable low level feet reducing overall height to 1400mm available as an optional extra.
- Integral fan blown refrigeration system.
- Eye level electronic controller installed on operators side (GO) with rear doors.

Image: VC900-GO



Stock Code	Overall Size mm	Weight kg	Wattage kw
VC600-GO	600(w) x 750(d) x 1465(h)	138	1.5
VC900-GO	900(w) x 750(d) x 1465(h)	183	1.7
VC1200-GO	1200(w) x 750(d) x 1465(h)	233	2.0
VC1300-GO	1300(w) x 750(d) x 1465(h)	253	2.0
VC1800-GO	1800(w) x 770(d) x 1465 (h)	333	2.3

Image: SVC900-GO



Stock Code	Overall Size mm	Weight kg	Wattage kw
SVC600-GO	600(w) x 750(d) x 1470(h)	144	1.5
SVC900-GO	900(w) x 750(d) x 1470(h)	191	1.7
SVC1200-GO	1200(w) x 750(d) x 1470(h)	243	2.0
SVC1500-GO	1500(w) x 770(d) x 1470(h)	298	2.3
SVC1800-GO	1800(w) x 770(d) x 1470(h)	349	2.3
SVC2100-GO	2100(w) x 770(d) x 1470(h)	402	2.8



enclosed **chilled** assisted service



- Fully enclosed display maintains food at a regulated temperature.
- Ideal for sandwiches, filled rolls, dairy products, drinks etc.
- Three glass shelves with LED illumination to all shelf levels.
- Castors included as standard which give an overall height of 1465mm.
- Adjustable low level feet reducing overall height to 1400mm available as an optional extra.
- Integral fan blown refrigeration system.
- Front glass lift panel with hydraulic gas assisted hinges.
- Eye level electronic controller installed on operators side (GO) with rear doors.

hydraulic gas assisted hinge models

Image: VCL900-GO



Stock Code	Overall Size mm	Weight kg	Wattage kw
VCL600-GO	600(w) x 750(d) x 1465(h)	141	1.5
VCL900-GO	900(w) x 750(d) x 1465(h)	186	1.7
VCL1200-GO	1200(w) x 750(d) x 1465(h)	236	2.0
VCL1300-GO	1300(w) x 750(d) x 1465(h)	262	2.0

Image: SVCL900-GO



Stock Code	Overall Size mm	Weight kg	Wattage kw
SVCL600-GO	600(w) x 750(d) x 1470(h)	147	1.5
SVCL900-GO	900(w) x 750(d) x 1470(h)	194	1.7
SVCL1200-GO	1200(w) x 750(d) x 1470(h)	246	2.0

vision aire • chilled • free standing

hydraulic gas assisted hinges



Image: VCL1200-GO



vision aire



open fronted **chilled** self help drop-in



Ambient, **Heated** and **Chilled** options available for all displays.

vision aire • chilled • drop-in

*“Quite simply the best
food and drink displays
on the market.”*



Model illustrated: SVOCDI2100



open fronted **chilled** self help



- Ideal for sandwiches, filled rolls, dairy products, drinks etc.
- Three glass shelves with LED illumination to all shelf levels.
- Integral fan blown refrigeration system.
- Eye level electronic controller installed on operators side (GO) with rear doors.
- The electric controller can be installed on customer side (GC) with fixed back.

Image: VOCDI900-GO



Stock Code	Overall Size mm	Weight kg	Wattage kw
VOCDI600-GO	600(w) x 750(d) x 826(h)	135	1.5
VOCDI900-GO	900(w) x 750(d) x 826(h)	180	2.3
VOCDI1200-GO	1200(w) x 750(d) x 826(h)	230	2.3
VOCDI1500-GO	1500(w) x 750(d) x 826(h)	280	2.5
VOCDI1800-GO	1800(w) x 750(d) x 826(h)	330	2.8
VOCDI2100-GO	2100(w) x 750(d) x 826(h)	380	2.8
VOCDI600-GC	600(w) x 750(d) x 826(h)	135	1.5
VOCDI900-GC	900(w) x 750(d) x 826(h)	180	2.3
VOCDI1200-GC	1200(w) x 750(d) x 826(h)	230	2.3
VOCDI1500-GC	1500(w) x 750(d) x 826(h)	280	2.5
VOCDI1800-GC	1800(w) x 750(d) x 826(h)	330	2.8
VOCDI2100-GC	2100(w) x 750(d) x 826(h)	380	2.8

Image: SVOCDI900-GO



Stock Code	Overall Size mm	Weight kg	Wattage kw
SVOCDI600-GO	600(w) x 750(d) x 834(h)	141	1.5
SVOCDI900-GO	900(w) x 750(d) x 834(h)	188	2.3
SVOCDI1200-GO	1200(w) x 750(d) x 834(h)	240	2.3
SVOCDI1500-GO	1500(w) x 750(d) x 834(h)	292	2.5
SVOCDI1800-GO	1800(w) x 750(d) x 834(h)	346	2.8
SVOCDI2100-GO	2100(w) x 750(d) x 834(h)	398	2.8
SVOCDI600-GC	600(w) x 750(d) x 834(h)	141	1.5
SVOCDI900-GC	900(w) x 750(d) x 834(h)	188	2.3
SVOCDI1200-GC	1200(w) x 750(d) x 834(h)	240	2.3
SVOCDI1500-GC	1500(w) x 750(d) x 834(h)	292	2.5
SVOCDI1800-GC	1800(w) x 750(d) x 834(h)	346	2.8
SVOCDI2100-GC	2100(w) x 750(d) x 834(h)	398	2.8

vision aire • chilled • drop-ins

enclosed **chilled** assisted service



- Ideal for sandwiches, filled rolls, dairy products, drinks etc.
- Three glass shelves with LED illumination to all shelf levels.
- Integral fan blown refrigeration system.
- Eye level electronic controller installed on operators side (GO) with rear doors.

Image: VCDI900-GO



Stock Code	Overall Size mm	Weight kg	Wattage kw
VCDI600-GO	600(w) x 750(d) x 826(h)	138	1.5
VCDI900-GO	900(w) x 750(d) x 826(h)	183	1.7
VCDI1200-GO	1200(w) x 750(d) x 826(h)	233	2.0
VCDI1300-GO	1300(w) x 750(d) x 826(h)	252	2.0
VCDI1800-GO	1800(w) x 750(d) x 826(h)	302	2.3

Image: SVCDI900-GO



Stock Code	Overall Size mm	Weight kg	Wattage kw
SVCDI600-GO	600(w) x 750(d) x 834(h)	144	1.5
SVCDI900-GO	900(w) x 750(d) x 834(h)	191	1.7
SVCDI1200-GO	1200(w) x 750(d) x 834(h)	243	2.0
SVCDI1500-GO	1300(w) x 750(d) x 834(h)	264	2.3
SVCDI1800-GO	1800(w) x 750(d) x 834(h)	318	2.3
SVCDI2100-GO	2100(w) x 750(d) x 834(h)	370	2.8



open fronted ambient self help



- Open fronted ambient free-standing display for self help service.
- Ideal for confectionery, crisps, fruit etc.
- Three glass shelves with LED illumination to all shelf levels.
- Castors included as standard which give an overall height of 1465mm.
- Adjustable low level feet reducing overall height to 1400mm available as an optional extra.
- Open back as standard. Rear doors available for this display.
- A wide range of optional extras are available. Call for further details.

Image: VOA900



Stock Code	Overall Size mm	Weight kg	Wattage kw
VOA600	600(w) x 750(d) x 1465(h)	100	0.3
VOA900	900(w) x 750(d) x 1465(h)	140	0.4
VOA1200	1200(w) x 750(d) x 1465(h)	180	0.5

Image: SVOA900



Stock Code	Overall Size mm	Weight kg	Wattage kw
SVOA600	600(w) x 750(d) x 1470(h)	106	0.3
SVOA900	900(w) x 750(d) x 1470(h)	148	0.4
SVOA1200	1200(w) x 750(d) x 1470(h)	190	0.5

vision aire • ambient • free standing

enclosed ambient assisted service



- Fully enclosed ambient free-standing display for assisted service.
- Ideal for confectionery, crisps, fruit etc.
- Three glass shelves with LED illumination to all shelf levels.
- Castors included as standard which give an overall height of 1465mm.
- Adjustable low level feet reducing overall height to 1400mm available as an optional extra.
- Open back as standard. Rear doors available for this display.
- A wide range of optional extras are available. Call for further details.

Image: VA900



Image: SVA900



Stock Code	Overall Size mm	Weight kg	Wattage kw
VA600	600(w) x 750(d) x 1465(h)	103	0.3
VA900	900(w) x 750(d) x 1465(h)	143	0.4
VA1200	1200(w) x 750(d) x 1465(h)	183	0.5
VA1300	1300(w) x 750(d) x 1465(h)	203	0.5

Stock Code	Overall Size mm	Weight kg	Wattage kw
SVA600	600(w) x 750(d) x 1470(h)	109	0.3
SVA900	900(w) x 750(d) x 1470(h)	151	0.4
SVA1200	1200(w) x 750(d) x 1470(h)	193	0.5



enclosed **ambient** assisted service



- Fully enclosed ambient free-standing food display for assisted service.
- Ideal for confectionery, crisps, fruit etc.
- Three glass shelves with LED illumination to all shelf levels.
- Castors included as standard which give an overall height of 1465 mm.
- Adjustable low level feet reducing overall height to 1400mm available as an optional extra.
- Open back as standard. Rear doors available for this display.
- Front glass lift panel with hydraulic gas assisted hinges.

hydraulic gas assisted hinge models

Image: VAL900



Image: SVAL900



Stock Code	Overall Size mm	Weight kg	Wattage kw
VAL600	600(w) x 750(d) x 1465(h)	106	0.3
VAL900	900(w) x 750(d) x 1465(h)	146	0.4
VAL1200	1200(w) x 750(d) x 1465(h)	186	0.5
VAL1300	1300(w) x 750(d) x 1465(h)	206	0.5

Stock Code	Overall Size mm	Weight kg	Wattage kw
SVAL600	600(w) x 750(d) x 1470(h)	112	0.3
SVAL900	900(w) x 750(d) x 1470(h)	154	0.4
SVAL1200	1200(w) x 750(d) x 1470(h)	196	0.5

vision aire • ambient • free-standing



*hydraulic gas
assisted hinges*



Image: SVAL1200



open fronted ambient self help



- Open fronted ambient drop-in display for self help service.
- Ideal for confectionery, crisps, fruit etc.
- Three glass shelves with LED illumination to all shelf levels.
- Open back as standard. Rear doors available for this display.
- A wide range of optional extras are available. Call for further details.

Image: VOADI900



Image: SVOADI900



Stock Code	Overall Size mm	Weight kg	Wattage kw
VOADI600	600(w) x 750(d) x 826(h)	70	0.3
VOADI900	900(w) x 750(d) x 826(h)	84	0.4
VOADI1200	1200(w) x 750(d) x 826(h)	108	0.5

Stock Code	Overall Size mm	Weight kg	Wattage kw
SVOADI600	600(w) x 750(d) x 834(h)	76	0.3
SVOADI900	900(w) x 750(d) x 834(h)	92	0.4
SVOADI1200	1200(w) x 750(d) x 834(h)	118	0.5

enclosed **ambient** assisted service



- Fully enclosed ambient drop-in display for assisted service.
- Ideal for confectionery, crisps, fruit etc.
- Three glass shelves with LED illumination to all shelf levels.
- Open back as standard. Rear doors available for this display.
- A wide range of optional extras are available. Call for further details.

Image: VADI900



Image: SVADI900



Stock Code	Overall Size mm	Weight kg	Wattage kw
VADI600	600(w) x 750(d) x 826(h)	73	0.3
VADI900	900(w) x 750(d) x 826(h)	87	0.4
VADI1200	1200(w) x 750(d) x 826(h)	111	0.5

Stock Code	Overall Size mm	Weight kg	Wattage kw
SVADI600	600(w) x 750(d) x 834(h)	79	0.3
SVADI900	900(w) x 750(d) x 834(h)	95	0.4
SVADI1200	1200(w) x 750(d) x 834(h)	121	0.5



Holidays in the forest.

The Bakery, located within the ParcMarket at Centre Parcs, Sherwood Forest provides freshly baked goods and delicious sweet treats. Specified and installed by the Jordon Group the chilled units were supplied using Counterline's new option of LED shelving with them opting for cool white. Both refrigerated models are controllable via an RDM (remote device management) network.





A family run independent supermarket chain.

The Modular Deli Counter at Proudfoot Convenience Store, Scarborough, offers locals fantastic meal options at very reasonable prices.

The matching combination of Heated and Chilled patisserie cabinets incorporate Counterline's additional features such as lift-up glass panels with gas assisted hinges and LED shelving.





University Hospital of Wales.

University Hospital of Wales is a teaching hospital of Cardiff University School of Medicine. The brief was to provide a new servery counter on a stainless steel frame with the outside panels featuring orange down lighters. The servery, coffee and sandwich section used vision aire chilled and heated drop in displays. The main servery area used our da vinci heated ceran plates and a chilled well drop in.



vision aire options and technical specifications

Optional extras

All Free Standing and Drop-In Displays

Shelf edge ticket strips (clear).

Fascia panels.

Export packing case.

We strongly recommend the purchase of export packing cases for goods exported outside of mainland UK.

Drop-in Chilled Displays

Non-standard airflow kit for condensing unit.

Standard technical specifications

All Displays

General construction from 304 and 430 grade polished stainless steel.

All glass 6mm toughened.

Full internal fuse protection.

Heated Displays

Product temperature maintained at 65-72°C in 20°C ambient.

Chilled Displays

Chilled by recirculated cold air using fan blown evaporator.

Integral condensing unit and automatic condensate evaporator.

Resettable high pressure safety switch.

Digital electronic temperature control.

Display temperature 3-5°C in 25°C ambient at 50% relative humidity.

Power Supplies

All units are supplied with a 3.5m lead suitable for use with a 220/240volt supply.


We strongly recommend that the supply is protected by a suitably rated residual current protection device.

Wattage


Vision Aire free standing and drop-in display units range from 0.3 kw to 3.0 kw.

Please note that other bespoke options are available on request.

Vision Aire Free Standing Displays


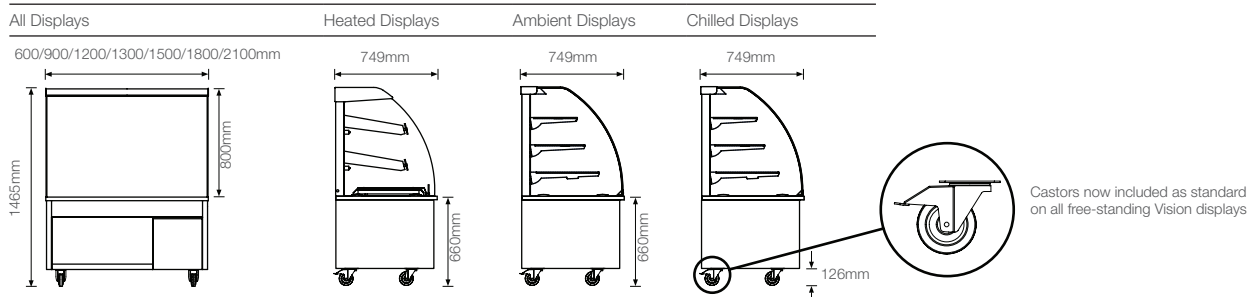


Vision Drop-In Displays

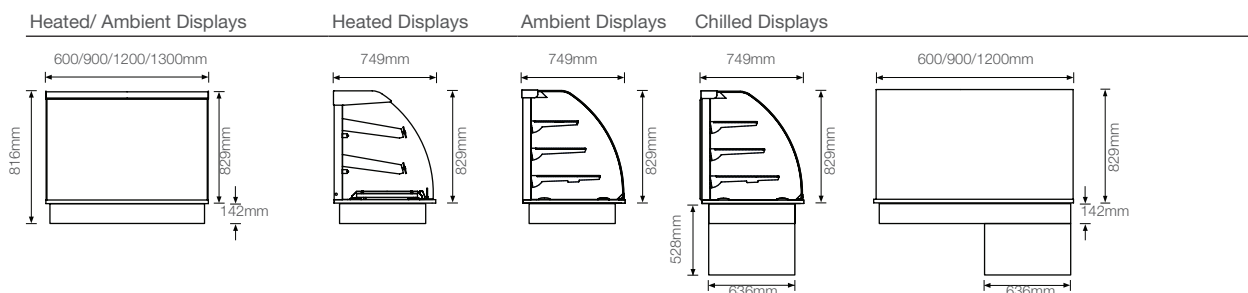

Visuals above are for illustrative purposes only and may not reflect the basic specification. Counterline reserves the right to alter the price and specification of the range at any time.

All orders are accepted subject to Counterline's standard terms and conditions which are available from our website or our sales team. All prices exclude VAT which will be charged at the prevailing rate. It is strongly recommended that the installation instructions be referred to before designing any base unit to accommodate idesign displays. Refer to our website www.counterline.co.uk for further options.

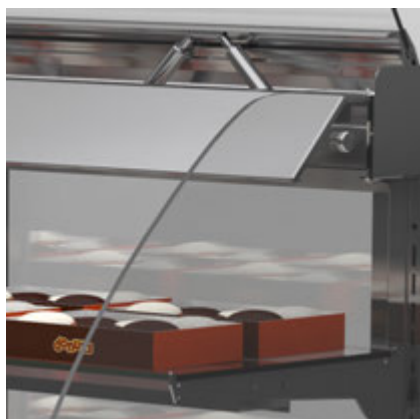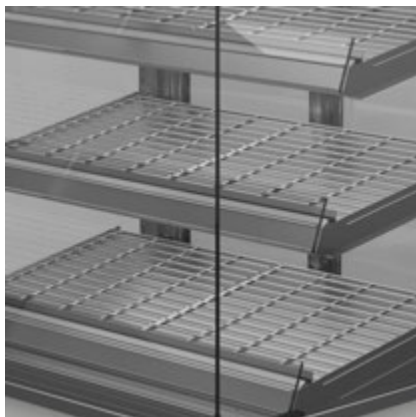

Counterline Limited
Randles Road
Knowsley Business Park
Merseyside
L34 9HZ
United Kingdom

tel: + 44 (0)151 548 2211
fax: + 44 (0)151 549 2179
email: enquiries@counterline.co.uk
web: www.counterline.co.uk

CE All images, photographs, text, diagrams, brand names, logos and other artistic or literary works contained in this brochure (Intellectual Property Rights) are protected by copyright, database rights, design rights, registered designs, trade marks or service marks, trade names or know how (whether registered or not) and all rights or forms of protection of a similar nature anywhere in the world including any applications for any of the foregoing.

All Intellectual Property Rights in this brochure or appearing on our website or promotional material are owned by or licensed to Counterline Limited, and may not be reproduced or copied without permission.

Terms & Conditions / Warranty

Full details of Counterline's Terms & Conditions and parts and labour warranty in the UK are available on request.