



counterline   
setting the standard











THE QUEEN'S AWARDS  
FOR ENTERPRISE

# icapacity

part of the idesign range

## contents

<b>contents &amp; introduction</b>	<b>02</b>
Introduction to the icapacity range	
<b>new innovation</b>	<b>03</b>
New range of colours available.	
 <b>standard • chilled</b>	<b>04-07</b>
Details of our standard chilled displays.	
 <b>standard tall • chilled</b>	<b>08-11</b>
Details of our standard tall chilled displays.	
 <b>narrow • chilled</b>	<b>12-15</b>
Details of our narrow chilled displays.	
 <b>narrow tall • chilled</b>	<b>16-19</b>
Details of our narrow tall chilled displays.	
<b>icapacity displays</b>	<b>20-21</b>
Our heated and chilled merchandisers on display.	
 <b>standard • heated</b>	<b>22-23</b>
Details of our standard heated displays.	
 <b>standard tall • heated</b>	<b>24-25</b>
Details of our standard tall heated displays.	
 <b>narrow • heated</b>	<b>26-27</b>
Details of our narrow heated displays.	
 <b>narrow tall • heated</b>	<b>28-29</b>
Details of our narrow tall heated displays.	
<b>night blinds • optional graphics</b>	<b>30-31</b>
Illustrations of our Night Blinds with optional graphics.	
<b>roller shutters • optional graphics</b>	<b>32-33</b>
Illustrations of our Roller Shutters with optional graphics.	
<b>heated &amp; chilled • dimensions</b>	<b>34-35</b>
Physical dimensions of our icapacity displays.	
<b>optional extras</b>	<b>36-37</b>
A range of optional extras.	
<b>case studies</b>	<b>38</b>
A selection of case studies.	
<b>technical specifications • packaging</b>	<b>39</b>

Counterline is delighted to introduce to you the latest addition to the idesign range: **icapacity**

The **icapacity** range of free-standing Food & Drink merchandisers are specifically designed to support high volume food and drink outlets with professional display and operation capabilities.

The convenience industry grows ever more competitive each day. Retailers need that something special! With Counterline's merchandisers our elegant and modern design features are sure to attract customers and make your food and drink offers the choice for them today and tomorrow.








Designed with the latest refrigeration and fan assisted heat technologies, they are manufactured from the highest quality BS standard Stainless Steel and Toughened Glass. These displays are designed to provide a co-ordinated and seamless appeal for both Hot & Cold displays but are just as impressive as stand-alone individual units.

The chilled displays are supported with the latest ZERO emission refrigeration systems and LED illumination. All levels of display are adjustable and removable for maximum menu flexibility. The heated displays offer 4 "Zones" of energy efficient heating. Each Zone has its own easy to use digital control to support all variations of hot food and packaging combinations.

All Counterline merchandisers maintain the appealing look and product quality of more perishable foods for a far longer time period. For the best product quality, longest display times and reduced wastage we are the choice of COSTA, EAT, BP and TESCO amongst others.

Both Heated and Chilled are readily available in a variety of widths, in neutral and coloured finishes with custom branding being another part of our service. **icapacity** offers unparalleled performance and flexibility for today's 'Food-To-Go' service providers.

icon guide

-  heated display
-  chilled display
-  13 Amp plug (plug & play)
-  32 Amp commando plug
-  eco friendly
-  fan assisted
-  LED illumination

# The perfect 'Food-To-Go' solution

A new innovation has arrived from Counterline.  
Now you can choose from a range of popular colours !!!

CHCMD12-RS - Chilled display in Classic White.

HHCMD06-NB - Heated display in Classic Black.



Our colour range has a beautiful subtle textured finish. A galvanised substrate (BS EN 10346:2009) it provides a durable, abrasion resistant surface and has excellent corrosion resistance. (Please contact us for details of our full colour range).

Counterline displays are supplied as standard in high quality satin polished stainless steel.



# standard • chilled



- This display maintains pre-chilled food and drink at a regulated temperature of 3°C - 5°C.
- Open fronted self help service, to five levels of display.
- Ideal for Sandwiches, Filled Rolls, Baguettes, Salad, Pasta, Dairy Products, Cream Cakes, Smoothies, Bottled, Canned and Carton Drinks.
- Zero Emission Eco Friendly Hydrocarbon Refrigeration.
- Low Energy LED illuminated interior.
- Automatic condensate evaporator complete with Eco water level sensor.
- Conforms to ISO 23953 standard, CE.
- Durable castors below with adjustable feet for positioning.
- Allowing 24 hour operation.
- 3.5m mains lead with 13A plug as standard.
- Custom specific branding & design adjustments available.

Image: CHCMD06-NB-GE



Image: CHCMD09-RS-GE



## 600mm - Standard

Stock Code	Overall Size mm	Weight kg	Wattage kw
CHCMD06-NB	645(w) x 725(d) x 1859(h)	145	2.2
CHCMD06-NB-GE	645(w) x 725(d) x 1859(h)	155	2.2
CHCMD06-RS	645(w) x 725(d) x 1859(h)	150	2.2
CHCMD06-RS-GE	645(w) x 725(d) x 1859(h)	160	2.2

## Options

Stock Code	Description
CHC06-DR	Rear Door/s
CHC06-DSL	Glass Display Shelf • Under-shelf Lights
CHC06-SSL	Stainless Steel Display Shelf • Under-shelf Lights
CHC06-POSB	Stainless Steel Wire Point of Sale Impulse Baskets

## 900mm - Standard

Stock Code	Overall Size mm	Weight kg	Wattage kw
CHCMD09-NB	945(w) x 725(d) x 1859(h)	165	2.4
CHCMD09-NB-GE	945(w) x 725(d) x 1859(h)	175	2.4
CHCMD09-RS	945(w) x 725(d) x 1859(h)	170	2.4
CHCMD09-RS-GE	945(w) x 725(d) x 1859(h)	180	2.4

## Options

Stock Code	Description
CHC09-DR	Rear Door/s
CHC09-DSL	Glass Display Shelf • Under-shelf Lights
CHC09-SSL	Stainless Steel Display Shelf • Under-shelf Lights
CHC09-POSB	Stainless Steel Wire Point of Sale Impulse Baskets



Image: CHCMD12-RS-GE



**1200mm - Standard**

Stock Code	Overall Size mm	Weight kg	Wattage kw
CHCMD12-NB	1245(w) x 725(d) x 1859(h)	205	2.5
CHCMD12-NB-GE	1245(w) x 725(d) x 1859(h)	215	2.5
CHCMD12-RS	1245(w) x 725(d) x 1859(h)	210	2.5
CHCMD12-RS-GE	1245(w) x 725(d) x 1859(h)	220	2.5

**Options**

Stock Code	Description
CHC12-DR	Rear Door/s
CHC12-DSL	Glass Display Shelf • Under-shelf Lights
CHC12-SSL	Stainless Steel Display Shelf • Under-shelf Lights
CHC12-POSB	Stainless Steel Wire Point of Sale Impulse Baskets

icapacity • chilled



standard • chilled



Image: CHCMD15-NB-GE - CHC15-DR (Optional Rear Doors)



1500mm - Standard			
Stock Code	Overall Size mm	Weight kg	Wattage kw
CHCMD15-NB	1545(w) x 725(d) x 1859(h)	255	2.6
CHCMD15-NB-GE	1545(w) x 725(d) x 1859(h)	265	2.6
CHCMD15-RS	1545(w) x 725(d) x 1859(h)	260	2.6
CHCMD15-RS-GE	1545(w) x 725(d) x 1859(h)	270	2.6

Options	
Stock Code	Description
CHC15-DR	Rear Door/s
CHC15-DSL	Glass Display Shelf • Under-shelf Lights
CHC15-SSL	Stainless Steel Display Shelf • Under-shelf Lights
CHC15-POSB	Stainless Steel Wire Point of Sale Impulse Baskets



standard • chilled



- This display maintains pre-chilled food and drink at a regulated temperature of 3°C - 5°C.
- Open fronted self help service, to five levels of display.
- Ideal for Sandwiches, Filled Rolls, Baguettes, Salad, Pasta, Dairy Products, Cream Cakes, Smoothies, Bottled, Canned and Carton Drinks.
- Zero Emission Eco Friendly Hydrocarbon Refrigeration.
- Low Energy LED illuminated interior.
- Automatic condensate evaporator complete with Eco water level sensor.
- Conforms to ISO 23953 standard, CE.
- Durable castors below with adjustable feet for positioning.
- Allowing 24 hour operation.
- 3.5m mains lead with 13A plug as standard.
- Custom specific branding & design adjustments available.

Image: CHCMD18-RS-GE



Image: CHCMD20-NB-GE



**1800mm - Standard**

Stock Code	Overall Size mm	Weight kg	Wattage kw
CHCMD18-NB	1845(w) x 725(d) x 1859(h)	295	2.8
CHCMD18-NB-GE	1845(w) x 725(d) x 1859(h)	305	2.8
CHCMD18-RS	1845(w) x 725(d) x 1859(h)	300	2.8
CHCMD18-RS-GE	1845(w) x 725(d) x 1859(h)	310	2.8

**Options**

Stock Code	Description
CHC18-DR	Rear Door/s
CHC18-DSL	Glass Display Shelf • Under-shelf Lights
CHC18-SSL	Stainless Steel Display Shelf • Under-shelf Lights
CHC18-POSB	Stainless Steel Wire Point of Sale Impulse Baskets

**2000mm - Standard**

Stock Code	Overall Size mm	Weight kg	Wattage kw
CHCMD20-NB	2045(w) x 725(d) x 1859(h)	350	3.0
CHCMD20-NB-GE	2045(w) x 725(d) x 1859(h)	360	3.0
CHCMD20-RS	2045(w) x 725(d) x 1859(h)	355	3.0
CHCMD20-RS-GE	2045(w) x 725(d) x 1859(h)	365	3.0

**Options**

Stock Code	Description
CHC20-DR	Rear Door/s
CHC20-DSL	Glass Display Shelf • Under-shelf Lights
CHC20-SSL	Stainless Steel Display Shelf • Under-shelf Lights
CHC20-POSB	Stainless Steel Wire Point of Sale Impulse Baskets



# standard tall • chilled



- This display maintains pre-chilled food and drink at a regulated temperature of 3°C - 5°C.
- Open fronted self help service, tall interior allowing for an additional fifth display shelf.
- Ideal for Sandwiches, Filled Rolls, Baguettes, Salad, Pasta, Dairy Products, Cream Cakes, Smoothies, Bottled, Canned and Carton Drinks.
- Zero Emission Eco Friendly Hydrocarbon Refrigeration.
- Low Energy LED illuminated interior.
- Automatic condensate evaporator complete with Eco water level sensor.
- Conforms to ISO 23953 standard, CE.
- Durable castors below with adjustable feet for positioning.
- Allowing 24 hour operation.
- 3.5m mains lead with 13A plug as standard.
- Custom specific branding & design adjustments available.

Image: CHCTMD06-NB - CHCT06-DR (Optional Rear Door)



Image: CHCTMD09-NB-GE



## 600mm - Standard Tall

Stock Code	Overall Size mm	Weight kg	Wattage kw
CHCTMD06-NB	645(w) x 725(d) x 2059(h)	155	2.2
CHCTMD06-NB-GE	645(w) x 725(d) x 2059(h)	165	2.2
CHCTMD06-RS	645(w) x 725(d) x 2059(h)	160	2.2
CHCTMD06-RS-GE	645(w) x 725(d) x 2059(h)	170	2.2

## Options

Stock Code	Description
CHCT06-DR	Rear Door/s
CHCT06-DSL	Glass Display Shelf • Under-shelf Lights
CHCT06-SSL	Stainless Steel Display Shelf • Under-shelf Lights
CHC06-POSB	Stainless Steel Wire Point of Sale Impulse Baskets

## 900mm - Standard Tall

Stock Code	Overall Size mm	Weight kg	Wattage kw
CHCTMD09-NB	945(w) x 725(d) x 2059(h)	175	2.4
CHCTMD09-NB-GE	945(w) x 725(d) x 2059(h)	185	2.4
CHCTMD09-RS	945(w) x 725(d) x 2059(h)	180	2.4
CHCTMD09-RS-GE	945(w) x 725(d) x 2059(h)	190	2.4

## Options

Stock Code	Description
CHCT09-DR	Rear Door/s
CHCT09-DSL	Glass Display Shelf • Under-shelf Lights
CHCT09-SSL	Stainless Steel Display Shelf • Under-shelf Lights
CHC09-POSB	Stainless Steel Wire Point of Sale Impulse Baskets





Image: CHCTMD12-NB - CHCT12-DR (Optional Rear Doors)



1200mm - Standard Tall				Options	
Stock Code	Overall Size mm	Weight kg	Wattage kw	Stock Code	Description
CHCTMD12-NB	1245(w) x 725(d) x 2059(h)	215	2.5	CHCT12-DR	Rear Door/s
CHCTMD12-NB-GE	1245(w) x 725(d) x 2059(h)	225	2.5	CHCT12-DSL	Glass Display Shelf • Under-shelf Lights
CHCTMD12-RS	1245(w) x 725(d) x 2059(h)	220	2.5	CHCT12-SSL	Stainless Steel Display Shelf • Under-shelf Lights
CHCTMD12-RS-GE	1245(w) x 725(d) x 2059(h)	230	2.5	CHC12-POSB	Stainless Steel Wire Point of Sale Impulse Baskets

icapacity • chilled



standard tall • chilled



Image: CHCTMD15-NB-GE



**1500mm - Standard Tall**

Stock Code	Overall Size mm	Weight kg	Wattage kw
CHCTMD15-NB	1545(w) x 725(d) x 2059(h)	265	2.6
CHCTMD15-NB-GE	1545(w) x 725(d) x 2059(h)	275	2.6
CHCTMD15-RS	1545(w) x 725(d) x 2059(h)	270	2.6
CHCTMD15-RS-GE	1545(w) x 725(d) x 2059(h)	280	2.6

**Options**

Stock Code	Description
CHCT15-DR	Rear Door/s
CHCT15-DSL	Glass Display Shelf • Under-shelf Lights
CHCT15-SSL	Stainless Steel Display Shelf • Under-shelf Lights
CHC15-POSB	Stainless Steel Wire Point of Sale Impulse Baskets



## standard tall • chilled

- This display maintains pre-chilled food and drink at a regulated temperature of 3°C - 5°C.
- Open fronted self help service, tall interior allowing for an additional fifth display shelf..
- Ideal for Sandwiches, Filled Rolls, Baguettes, Salad, Pasta, Dairy Products, Cream Cakes, Smoothies, Bottled, Canned and Carton Drinks.
- Zero Emission Eco Friendly Hydrocarbon Refrigeration.
- Low Energy LED illuminated interior.
- Automatic condensate evaporator complete with Eco water level sensor.
- Conforms to ISO 23953 standard, CE.
- Durable castors below with adjustable feet for positioning.
- Allowing 24 hour operation.
- 3.5m mains lead with 13A plug as standard.
- Custom specific branding & design adjustments available.

Image: CHCTMD18-NB-GE



Image: CHCTMD20-NB-GE



### 1800mm - Standard Tall

Stock Code	Overall Size mm	Weight kg	Wattage kw
CHCTMD18-NB	1845(w) x 725(d) x 2059(h)	305	2.8
CHCTMD18-NB-GE	1845(w) x 725(d) x 2059(h)	315	2.8
CHCTMD18-RS	1845(w) x 725(d) x 2059(h)	310	2.8
CHCTMD18-RS-GE	1845(w) x 725(d) x 2059(h)	320	2.8

### Options

Stock Code	Description
CHCT18-DR	Rear Door/s
CHCT18-DSL	Glass Display Shelf • Under-shelf Lights
CHCT18-SSL	Stainless Steel Display Shelf
CHC18-POSB	Stainless Steel Wire Point of Sale Impulse Baskets

### 2000mm - Standard Tall

Stock Code	Overall Size mm	Weight kg	Wattage kw
CHCTMD20-NB	2045(w) x 725(d) x 2059(h)	360	3.0
CHCTMD20-NB-GE	2045(w) x 725(d) x 2059(h)	370	3.0
CHCTMD20-RS	2045(w) x 725(d) x 2059(h)	365	3.0
CHCTMD20-RS-GE	2045(w) x 725(d) x 2059(h)	375	3.0

### Options

Stock Code	Description
CHCT20-DR	Rear Door/s
CHCT20-DSL	Glass Display Shelf • Under-shelf Lights
CHCT20-SSL	Stainless Steel Display Shelf • Under-shelf Lights
CHC20-POSB	Stainless Steel Wire Point of Sale Impulse Baskets



## narrow • chilled

- This display maintains pre-chilled food and drink at a regulated temperature of 3°C - 5°C.
- Open fronted self help service, to five levels of display.
- Ideal for Sandwiches, Filled Rolls, Baguettes, Salad, Pasta, Dairy Products, Cream Cakes, Smoothies, Bottled, Canned and Carton Drinks.
- Zero Emission Eco Friendly Hydrocarbon Refrigeration.
- Low Energy LED illuminated interior.
- Automatic condensate evaporator complete with Eco water level sensor.
- Conforms to ISO 23953 standard, CE.
- Durable castors below with adjustable feet for positioning.
- Allowing 24 hour operation.
- 3.5m mains lead with 13A plug as standard.
- Custom specific branding & design adjustments available.

Image: CHCNMD06-RS



Image: CHCNMD09-RS-GE



### 600mm - Narrow

Stock Code	Overall Size mm	Weight kg	Wattage kw
CHCNMD06-NB	645(w) x 600(d) x 1859(h)	135	2.2
CHCNMD06-NB-GE	645(w) x 600(d) x 1859(h)	145	2.2
CHCNMD06-RS	645(w) x 600(d) x 1859(h)	140	2.2
CHCNMD06-RS-GE	645(w) x 600(d) x 1859(h)	150	2.2

### Options

Stock Code	Description
CHC06-DR	Rear Door/s
CHCN06-DSL	Glass Display Shelf • Under-shelf Lights
CHCN06-SSL	Stainless Steel Display Shelf • Under-shelf Lights
CHC06-POSB	Stainless Steel Wire Point of Sale Impulse Baskets

### 900mm - Narrow

Stock Code	Overall Size mm	Weight kg	Wattage kw
CHCNMD09-NB	945(w) x 600(d) x 1859(h)	155	2.4
CHCNMD09-NB-GE	945(w) x 600(d) x 1859(h)	165	2.4
CHCNMD09-RS	945(w) x 600(d) x 1859(h)	160	2.4
CHCNMD09-RS-GE	945(w) x 600(d) x 1859(h)	170	2.4

### Options

Stock Code	Description
CHC09-DR	Rear Door/s
CHCN09-DSL	Glass Display Shelf • Under-shelf Lights
CHCN09-SSL	Stainless Steel Display Shelf • Under-shelf Lights
CHC09-POSB	Stainless Steel Wire Point of Sale Impulse Baskets



Image: CHCNMD12-RS-GE



1200mm - Narrow				Options	
Stock Code	Overall Size mm	Weight kg	Wattage kw	Stock Code	Description
CHCNMD12-NB	1245(w) x 600(d) x 1859(h)	195	2.5	CHC12-DR	Rear Door/s
CHCNMD12-NB-GE	1245(w) x 600(d) x 1859(h)	205	2.5	CHCN12-DSL	Glass Display Shelf • Under-shelf Lights
CHCNMD12-RS	1245(w) x 600(d) x 1859(h)	200	2.5	CHCN12-SSL	Stainless Steel Display Shelf • Under-shelf Lights
CHCNMD12-RS-GE	1245(w) x 600(d) x 1859(h)	210	2.5	CHC12-POSB	Stainless Steel Wire Point of Sale Impulse Baskets

icapacity • chilled



narrow • chilled



Image: CHCNMD15-NB



**1500mm - Narrow**

Stock Code	Overall Size mm	Weight kg	Wattage kw
CHCNMD15-NB	1545(w) x 600(d) x 1859(h)	245	2.6
CHCNMD15-NB-GE	1545(w) x 600(d) x 1859(h)	255	2.6
CHCNMD15-RS	1545(w) x 600(d) x 1859(h)	250	2.6
CHCNMD15-RS-GE	1545(w) x 600(d) x 1859(h)	260	2.6

**Options**

Stock Code	Description
CHC15-DR	Rear Door/s
CHCN15-DSL	Glass Display Shelf • Under-shelf Lights
CHCN15-SSL	Stainless Steel Display Shelf • Under-shelf Lights
CHC15-POSB	Stainless Steel Display Shelf • Under-shelf Lights • Door/s



**R290  
ZERO  
CO<sub>2</sub> GAS  
EMISSIONS**

narrow • chilled



- This display maintains pre-chilled food and drink at a regulated temperature of 3°C - 5°C.
- Open fronted self help service, to five levels of display.
- Ideal for Sandwiches, Filled Rolls, Baguettes, Salad, Pasta, Dairy Products, Cream Cakes, Smoothies, Bottled, Canned and Carton Drinks..
- Zero Emission Eco Friendly Hydrocarbon Refrigeration.
- Low Energy LED illuminated interior.
- Automatic condensate evaporator complete with Eco water level sensor.
- Conforms to ISO 23953 standard, CE.
- Durable castors below with adjustable feet for positioning.
- Allowing 24 hour operation.
- 3.5m mains lead with 13A plug as standard.
- Custom specific branding & design adjustments available.

Image: CHCNMD18-RS-GE



Image: CHCNMD20-RS-GE



**1800mm - Narrow**

Stock Code	Overall Size mm	Weight kg	Wattage kw
CHCNMD18-NB	1845(w) x 600(d) x 1859(h)	285	2.8
CHCNMD18-NB-GE	1845(w) x 600(d) x 1859(h)	295	2.8
CHCNMD18-RS	1845(w) x 600(d) x 1859(h)	290	2.8
CHCNMD18-RS-GE	1845(w) x 600(d) x 1859(h)	300	2.8

**Options**

Stock Code	Description
CHC18-DR	Rear Door/s
CHCN18-DSL	Glass Display Shelf • Under-shelf Lights
CHCN18-SSL	Stainless Steel Display Shelf • Under-shelf Lights
CHC18-POSB	Stainless Steel Display Shelf • Under-shelf Lights • Door/s

**2000mm - Narrow**

Stock Code	Overall Size mm	Weight kg	Wattage kw
CHCNMD20-NB	2045(w) x 600(d) x 1859(h)	340	3.0
CHCNMD20-NB-GE	2045(w) x 600(d) x 1859(h)	350	3.0
CHCNMD20-RS	2045(w) x 600(d) x 1859(h)	345	3.0
CHCNMD20-RS-GE	2045(w) x 600(d) x 1859(h)	355	3.0

**Options**

Stock Code	Description
CHC20-DR	Rear Door/s
CHCN20-DSL	Glass Display Shelf • Under-shelf Lights
CHCN20-SSL	Stainless Steel Display Shelf • Under-shelf Lights
CHC20-POSB	Stainless Steel Display Shelf • Under-shelf Lights • Door/s



## narrow tall • chilled

- This display maintains pre-chilled food and drink at a regulated temperature of 3°C - 5°C.
- Open fronted self help service, tall interior allowing for an additional fifth display shelf.
- Ideal for Sandwiches, Filled Rolls, Baguettes, Salad, Pasta, Dairy Products, Cream Cakes, Smoothies, Bottled, Canned and Carton Drinks.
- Zero Emission Eco Friendly Hydrocarbon Refrigeration.
- Low Energy LED illuminated interior.
- Automatic condensate evaporator complete with Eco water level sensor.
- Conforms to ISO 23953 standard, CE.
- Durable castors below with adjustable feet for positioning.
- Allowing 24 hour operation.
- 3.5m mains lead with 13A plug as standard.
- Custom specific branding & design adjustments available.

Image: CHCNTMD06-RS



Image: CHCNTMD09-RS



### 600mm - Narrow Tall

Stock Code	Overall Size mm	Weight kg	Wattage kw
CHCNTMD06-NB	645(w) x 600(d) x 2059(h)	145	2.2
CHCNTMD06-NB-GE	645(w) x 600(d) x 2059(h)	155	2.2
CHCNTMD06-RS	645(w) x 600(d) x 2059(h)	150	2.2
CHCNTMD06-RS-GE	645(w) x 600(d) x 2059(h)	160	2.2

### Options

Stock Code	Description
CHCT06-DR	Rear Door/s
CHCNT06-DSL	Glass Display Shelf • Under-shelf Lights
CHCNT06-SSL	Stainless Steel Display Shelf • Under-shelf Lights
CHC06-POSB	Stainless Steel Wire Point of Sale Impulse Baskets

### 900mm - Narrow Tall

Stock Code	Overall Size mm	Weight kg	Wattage kw
CHCNTMD09-NB	945(w) x 600(d) x 2059(h)	165	2.4
CHCNTMD09-NB-GE	945(w) x 600(d) x 2059(h)	175	2.4
CHCNTMD09-RS	945(w) x 600(d) x 2059(h)	170	2.4
CHCNTMD09-RS-GE	945(w) x 600(d) x 2059(h)	180	2.4

### Options

Stock Code	Description
CHCT09-DR	Rear Door/s
CHCNT09-DSL	Glass Display Shelf • Under-shelf Lights
CHCNT09-SSL	Stainless Steel Display Shelf • Under-shelf Lights
CHC09-POSB	Stainless Steel Wire Point of Sale Impulse Baskets



icapacity • chilled



narrow tall • chilled

Image: CHCNTMD12-RS



### 1200mm - Narrow Tall

Stock Code	Overall Size mm	Weight kg	Wattage kw
CHCNTMD12-NB	1245(w) x 600(d) x 2059(h)	205	2.5
CHCNTMD12-NB-GE	1245(w) x 600(d) x 2059(h)	215	2.5
CHCNTMD12-RS	1245(w) x 600(d) x 2059(h)	210	2.5
CHCNTMD12-RS-GE	1245(w) x 600(d) x 2059(h)	220	2.5

### Options

Stock Code	Description
CHCT12-DR	Rear Door/s
CHCNT12-DSL	Glass Display Shelf • Under-shelf Lights
CHCNT12-SSL	Stainless Steel Display Shelf • Under-shelf Lights
CHC12-POSB	Stainless Steel Wire Point of Sale Impulse Baskets

icapacity • chilled

narrow tall • chilled



Image: CHCNTMD15-RS

**1500mm - Narrow Tall**

Stock Code	Overall Size mm	Weight kg	Wattage kw
CHCNTMD15-NB	1545(w) x 600(d) x 2059(h)	255	2.6
CHCNTMD15-NB-GE	1545(w) x 600(d) x 2059(h)	265	2.6
CHCNTMD15-RS	1545(w) x 600(d) x 2059(h)	260	2.6
CHCNTMD15-GE	1545(w) x 600(d) x 2059(h)	270	2.6

**Options**

Stock Code	Description
CHCT15-DR	Rear Door/s
CHCNT15-DSL	Glass Display Shelf • Under-shelf Lights
CHCNT15-SSL	Stainless Steel Display Shelf • Under-shelf Lights
CHC15-POSB	Stainless Steel Wire Point of Sale Impulse Baskets



## narrow tall • chilled

- This display maintains pre-chilled food and drink at a regulated temperature of 3°C - 5°C.
- Open fronted self help service, tall interior allowing for an additional fifth display shelf.
- Ideal for Sandwiches, Filled Rolls, Baguettes, Salad, Pasta, Dairy Products, Cream Cakes, Smoothies, Bottled, Canned and Carton Drinks.
- Zero Emission Eco Friendly Hydrocarbon Refrigeration.
- Low Energy LED illuminated interior.
- Automatic condensate evaporator complete with Eco water level sensor.
- Conforms to ISO 23953 standard, CE.
- Durable castors below with adjustable feet for positioning.
- Allowing 24 hour operation.
- 3.5m mains lead with 13A plug as standard.
- Custom specific branding & design adjustments available.

Image: CHCNTMD18-RS



Image: CHCNTMD20-RS



### 1800mm - Narrow Tall

Stock Code	Overall Size mm	Weight kg	Wattage kw
CHCNTMD18-NB	1845(w) x 600(d) x 2059(h)	295	2.8
CHCNTMD18-GE	1845(w) x 600(d) x 2059(h)	305	2.8
CHCNTMD18-RS	1845(w) x 600(d) x 2059(h)	300	2.8
CHCNTMD18-RS-GE	1845(w) x 600(d) x 2059(h)	310	2.8

### Options

Stock Code	Description
CHCT18-DR	Rear Door/s
CHCNT18-DSL	Glass Display Shelf • Under-shelf Lights
CHCNT18-SSL	Stainless Steel Display Shelf • Under-shelf Lights
CHC18-POSB	Stainless Steel Wire Point of Sale Impulse Baskets

### 2000mm - Narrow Tall

Stock Code	Overall Size mm	Weight kg	Wattage kw
CHCNTMD20-NB	2045(w) x 600(d) x 2059(h)	350	3.0
CHCNTMD20-NB-GE	2045(w) x 600(d) x 2059(h)	360	3.0
CHCNTMD20-RS	2045(w) x 600(d) x 2059(h)	355	3.0
CHCNTMD20-RS-GE	2045(w) x 600(d) x 2059(h)	365	3.0

### Options

Stock Code	Description
CHCT20-DR	Rear Door/s
CHCNT20-DSL	Glass Display Shelf • Under-shelf Lights
CHCNT20-SSL	Stainless Steel Display Shelf • Under-shelf Lights
CHC20-POSB	Stainless Steel Wire Point of Sale Impulse Baskets



*Quality, style and simplicity combined.*

WWW.COUn





terline.co.uk



*“Quite simply the best food and drink ‘to-go’ displays on the market”*



# standard • heated



- This display maintains pre-cooked foods at a regulated temperature of 63°C - 72°C.
- Open fronted self help service, to four levels of display.
- Ideal for Hot Wraps & Rolls, Soups, Porridge, Potted Noodles & Rice Dishes, Pizzas, Chickens and Savouries.
- Fan-assisted technology with separate temperature controls for each level.
- Internal shelving adjustable in height and angle for improved product visibility.
- Durable castors below with adjustable feet for positioning.
- Shelf covers are removable for cleaning.
- 3.5m mains lead with 13A plug as standard. (1200mm versions come complete with a 32 Amp commando plug).
- Custom specific branding & design adjustments available.



## 600mm - Standard

Stock Code	Overall Size mm	Weight kg	Wattage kw
HHCMD06-NB	645(w) x 725(d) x 1859(h)	135	2.5
HHCMD06-NB-GE	645(w) x 725(d) x 1859(h)	145	2.5

## Options

Stock Code	Description
HHC06-DR	Rear Door/s
HHC06-POSB	Stainless Steel Wire Point of Sale Impulse Baskets

## 900mm - Standard

Stock Code	Overall Size mm	Weight kg	Wattage kw
HHCMD09-NB	945(w) x 725(d) x 1859(h)	155	2.5
HHCMD09-NB-GE	945(w) x 725(d) x 1859(h)	165	2.5

## Options

Stock Code	Description
HHC09-DR	Rear Door/s
HHC09-POSB	Stainless Steel Wire Point of Sale Impulse Baskets

icapacity • heated



standard • heated

Image: HHCMD12-NB-GE



### 1200mm - Standard

Stock Code	Overall Size mm	Weight kg	Wattage kw
HHCMD12-NB	1245(w) x 725(d) x 1859(h)	195	4.0
HHCMD12-NB-GE	1245(w) x 725(d) x 1859(h)	205	4.0

### Options

Stock Code	Description
HHC12-DR	Rear Door/s
HHC12-POSB	Stainless Steel Wire Point of Sale Impulse Baskets

standard tall • heated



- This display maintains pre-cooked foods at a regulated temperature of 63°C - 72°C.
- Open fronted self help service, to four levels of display.
- Ideal for Hot Wraps & Rolls, Soups, Porridge, Potted Noodles & Rice Dishes, Pizzas, Chickens and Savouries.
- Fan-assisted technology with separate temperature controls for each level.
- Internal shelving adjustable in height and angle for improved product visibility.
- Durable castors below with adjustable feet for positioning.
- Shelf covers are removable for cleaning.
- 3.5m mains lead with 13A plug as standard. (1200mm versions come complete with a 32 Amp commando plug).
- Custom specific branding & design adjustments available.



600mm - Standard Tall			
Stock Code	Overall Size mm	Weight kg	Wattage kw
HHCTMD06-NB	645(w) x 725(d) x 2059(h)	145	2.5
HHCTMD06-NB-GE	645(w) x 725(d) x 2059(h)	155	2.5

Options	
Stock Code	Description
HHCT06-DR	Rear Door/s
HHC06-POSB	Stainless Steel Wire Point of Sale Impulse Baskets

900mm - Standard Tall			
Stock Code	Overall Size mm	Weight kg	Wattage kw
HHCTMD09-NB	945(w) x 725(d) x 2059(h)	165	2.5
HHCTMD09-NB-GE	945(w) x 725(d) x 2059(h)	175	2.5

Options	
Stock Code	Description
HHCT09-DR	Rear Door/s
HHC09-POSB	Stainless Steel Wire Point of Sale Impulse Baskets





standard tall • heated

Image: HHCTMD12-NB



**1200mm - Standard Tall**

Stock Code	Overall Size mm	Weight kg	Wattage kw
HHCTMD12-NB	1245(w) x 725(d) x 2059(h)	205	4.0
HHCTMD12-NB-GE	1245(w) x 725(d) x 2059(h)	215	4.0

**Options**

Stock Code	Description
HHCT12-DR	Rear Door/s
HHC12-POSB	Stainless Steel Wire Point of Sale Impulse Baskets



# narrow • heated



- This display maintains pre-cooked foods at a regulated temperature of 63°C - 72°C.
- Open fronted self help service, narrow version to four levels of display.
- Ideal for Hot Wraps & Rolls, Soups, Porridge, Potted Noodles & Rice Dishes, Pizzas, Chickens and Savouries.
- Fan-assisted technology with separate temperature controls for each level.
- Internal shelving adjustable in height and angle for improved product visibility.
- Durable castors below with adjustable feet for positioning.
- Shelf covers are removable for cleaning.
- 3.5m mains lead with 13A plug as standard. (1200mm versions come complete with a 32 Amp commando plug).
- Custom specific branding & design adjustments available.



## 600mm - Narrow

Stock Code	Overall Size mm	Weight kg	Wattage kw
HHCNMD06-NB	645(w) x 600(d) x 1859(h)	125	2.5
HHCNMD06-NB-GE	645(w) x 600(d) x 1859(h)	135	2.5

## Options

Stock Code	Description
HHC06-DR	Rear Door/s
HHC06-POSB	Stainless Steel Wire Point of Sale Impulse Baskets

## 900mm - Narrow

Stock Code	Overall Size mm	Weight kg	Wattage kw
HHCNMD09-NB	945(w) x 600(d) x 1859(h)	145	2.5
HHCNMD09-NB-GE	945(w) x 600(d) x 1859(h)	155	2.5

## Options

Stock Code	Description
HHC09-DR	Rear Door/s
HHC09-POSB	Stainless Steel Wire Point of Sale Impulse Baskets

icapacity • heated



narrow • heated

Image: HHCNMD12-NB-GE



### 1200mm - Narrow

Stock Code	Overall Size mm	Weight kg	Wattage kw
HHCNMD12-NB	1245(w) x 600(d) x 1859(h)	185	4.0
HHCNMD12-NB-GE	1245(w) x 600(d) x 1859(h)	195	4.0

### Options

Stock Code	Description
HHC12-DR	Rear Door/s
HHC12-POSB	Stainless Steel Wire Point of Sale Impulse Baskets

narrow tall • heated



- This display maintains pre-cooked foods at a regulated temperature of 63°C - 72°C.
- Open fronted self help service, narrow version to four levels of display.
- Ideal for Hot Wraps & Rolls, Soups, Porridge, Potted Noodles & Rice Dishes, Pizzas, Chickens and Savouries.
- Fan-assisted technology with separate temperature controls for each level.
- Internal shelving adjustable in height and angle for improved product visibility.
- Durable castors below with adjustable feet for positioning.
- Shelf covers are removable for cleaning.
- 3.5m mains lead with 13A plug as standard. (1200mm versions come complete with a 32 Amp commando plug).
- Custom specific branding & design adjustments available.



**600mm - Narrow Tall**

Stock Code	Overall Size mm	Weight kg	Wattage kw
HHCNTMD06-NB	645(w) x 600(d) x 2059(h)	135	2.5
HHCNTMD06-NB-GE	645(w) x 600(d) x 2059(h)	145	2.5

**Options**

Stock Code	Description
HHCT06-DR	Rear Door/s
HHC06-POSB	Stainless Steel Wire Point of Sale Impulse Baskets

**900mm - Narrow Tall**

Stock Code	Overall Size mm	Weight kg	Wattage kw
HHCNTMD09-NB	945(w) x 600(d) x 2059(h)	155	2.5
HHCNTMD09-NB-GE	945(w) x 600(d) x 2059(h)	165	2.5

**Options**

Stock Code	Description
HHCT09-DR	Rear Door/s
HHC09-POSB	Stainless Steel Wire Point of Sale Impulse Baskets



narrow tall • heated

Image: HHCNTMD12-NB-GE



### 1200mm - Narrow Tall

Stock Code	Overall Size mm	Weight kg	Wattage kw
HHCNTMD12-NB	1245(w) x 600(d) x 2059(h)	195	4.0
HHCNTMD12-NB-GE	1245(w) x 600(d) x 2059(h)	205	4.0

### Options

Stock Code	Description
HHCT12-DR	Rear Door/s
HHC12-POSB	Stainless Steel Wire Point of Sale Impulse Baskets

# night blind • standard

- Simple finger hoop allowing smooth open and close operation.



# night blind • custom graphics


- Insulated night blind can be printed with your own branding.



# roller shutter • standard



- Simple button grip allowing smooth open and close operation.
- Button grip comes with key locking mechanism to secure contents.

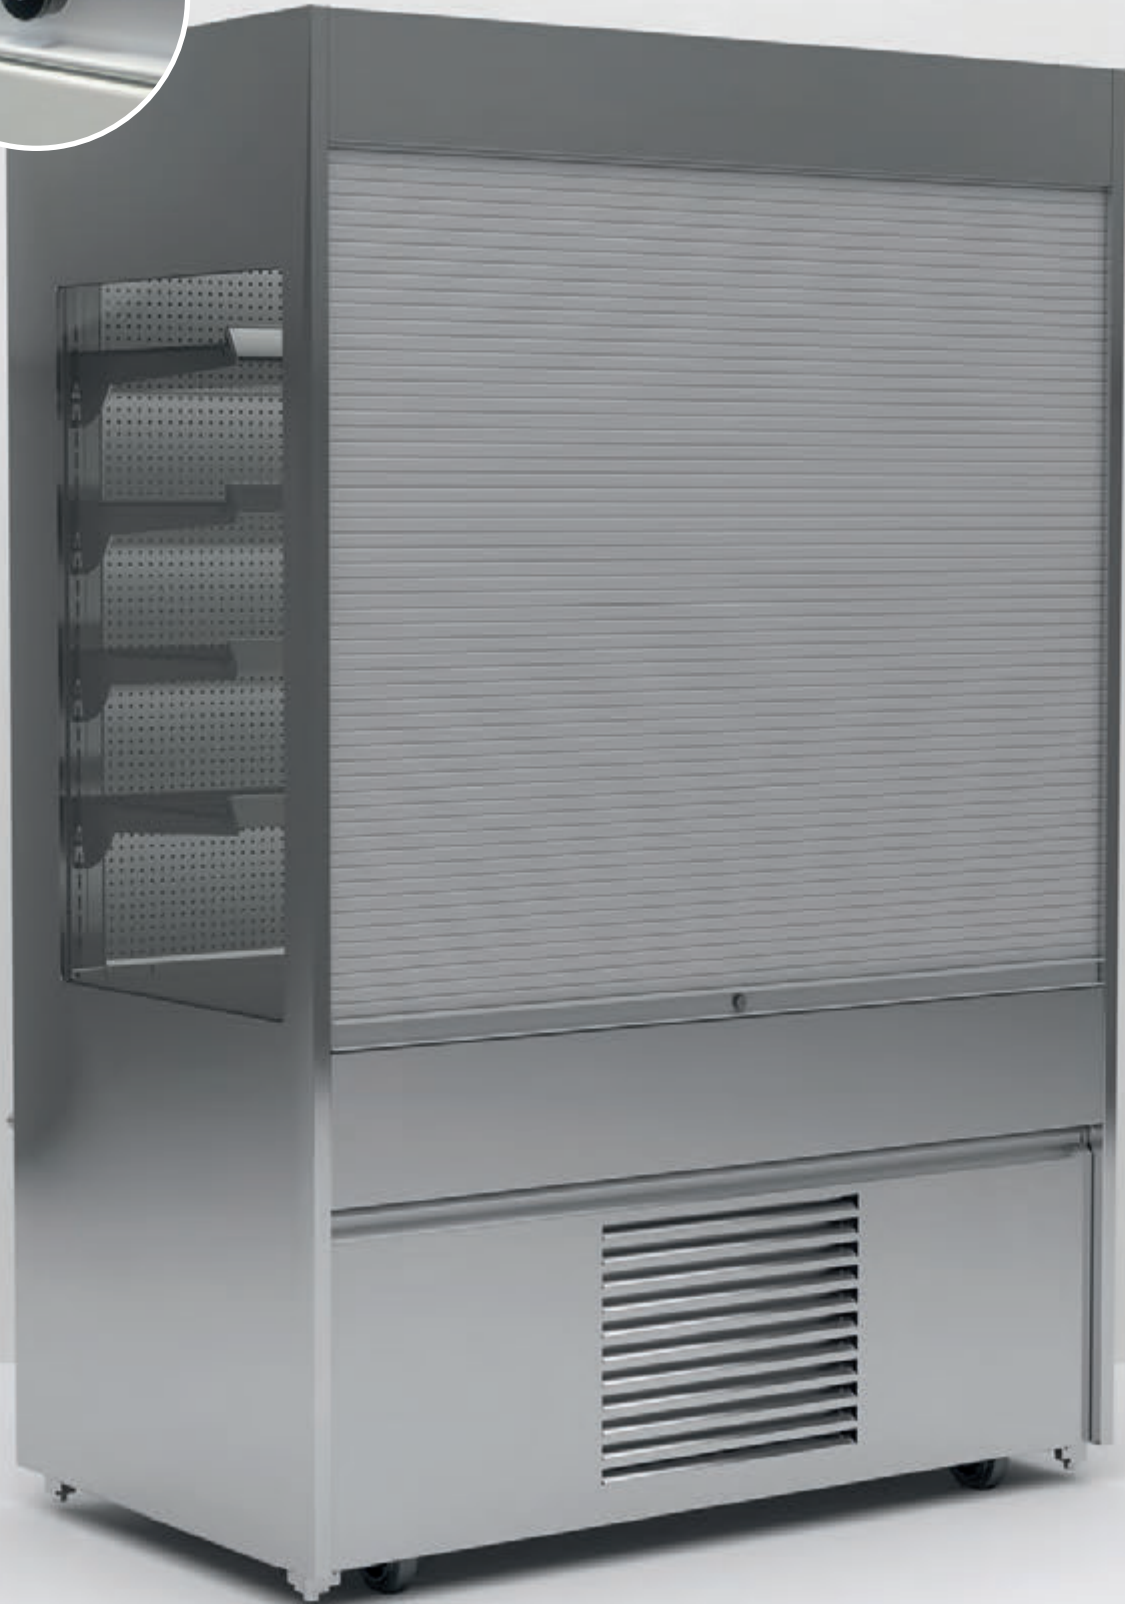



# roller shutter • custom graphics

- Locking roller shutter can be printed with your own branding.



## dimensions • chilled


(all sizes shown in millimetres)



### Standard - Chilled




### Standard Tall - Chilled

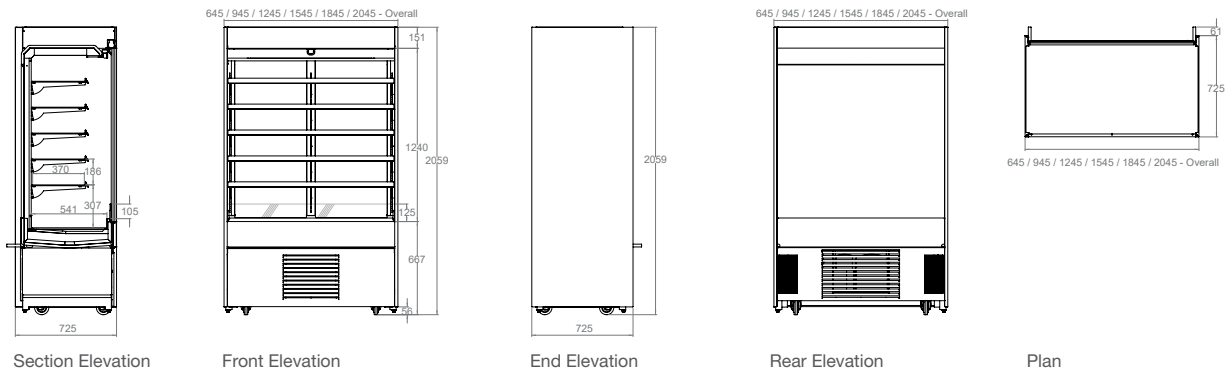

### Narrow - Chilled



### Narrow Tall - Chilled

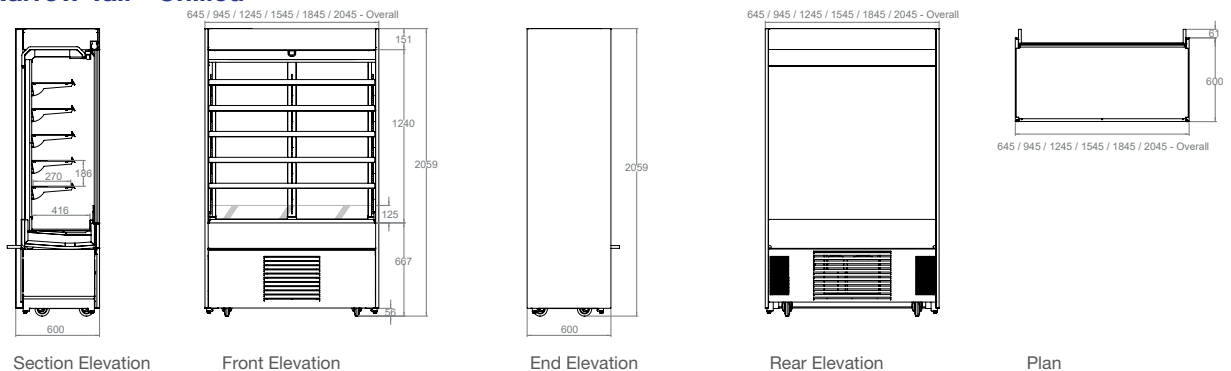


## dimensions • heated


(all sizes shown in millimetres)




### Standard - Heated

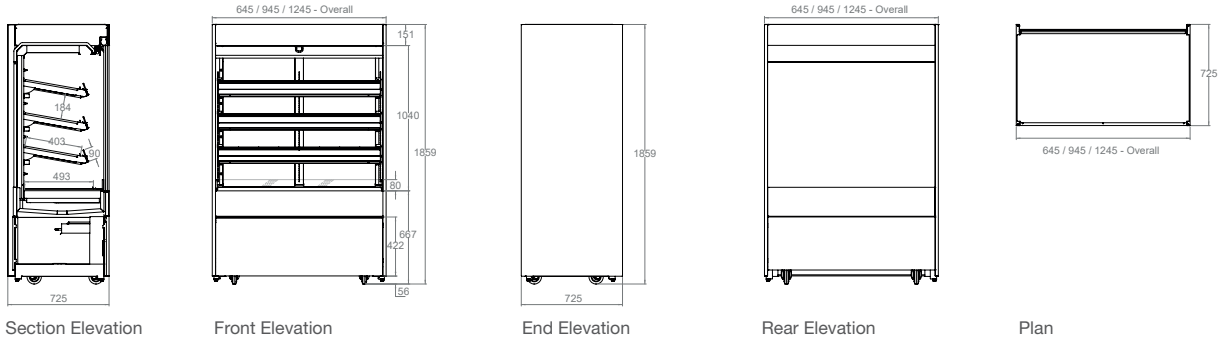


### Standard Tall - Heated

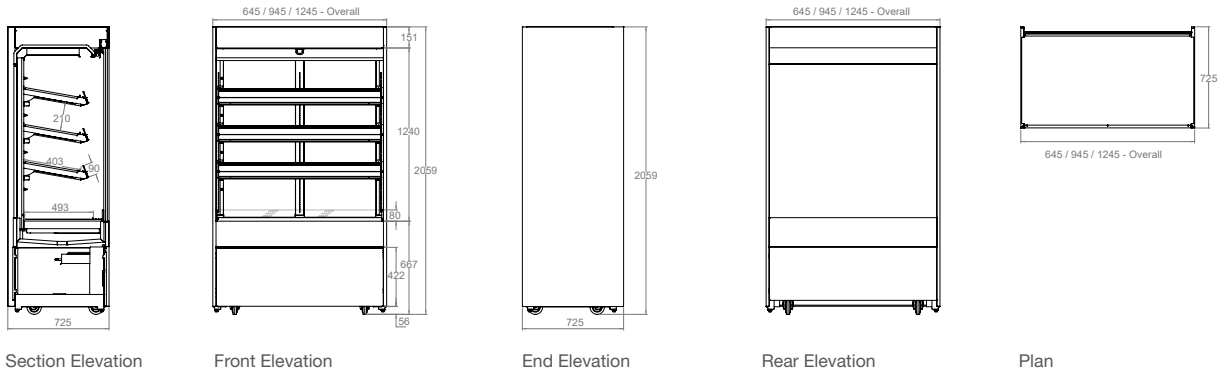

### Narrow - Heated

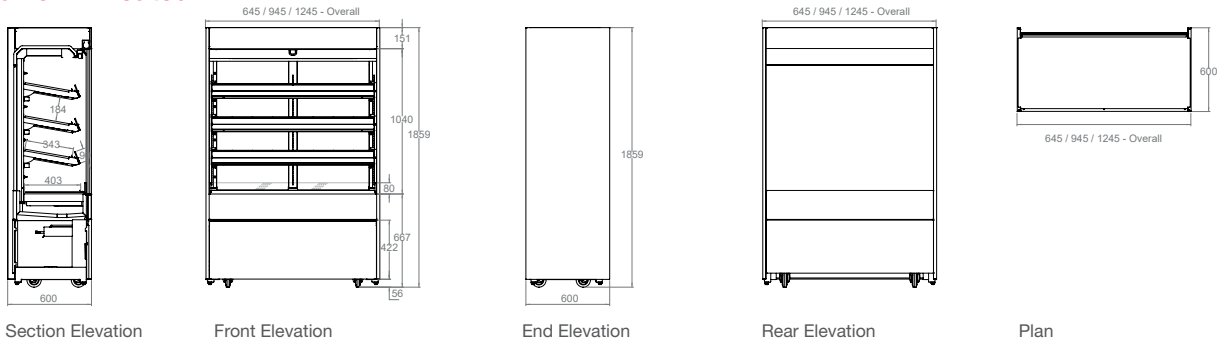

### Narrow Tall - Heated

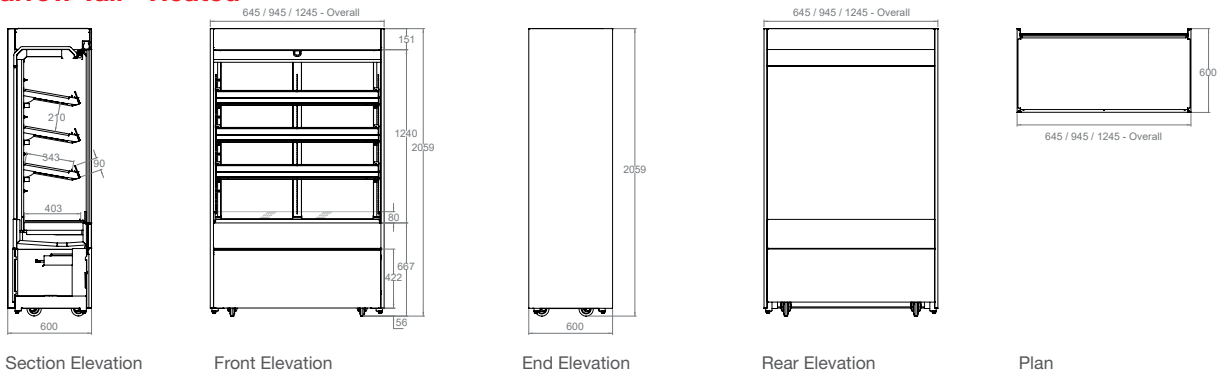

# optional extras





## Optional extras

### Description

Rear Doors

- Rear doors are available on all our displays.

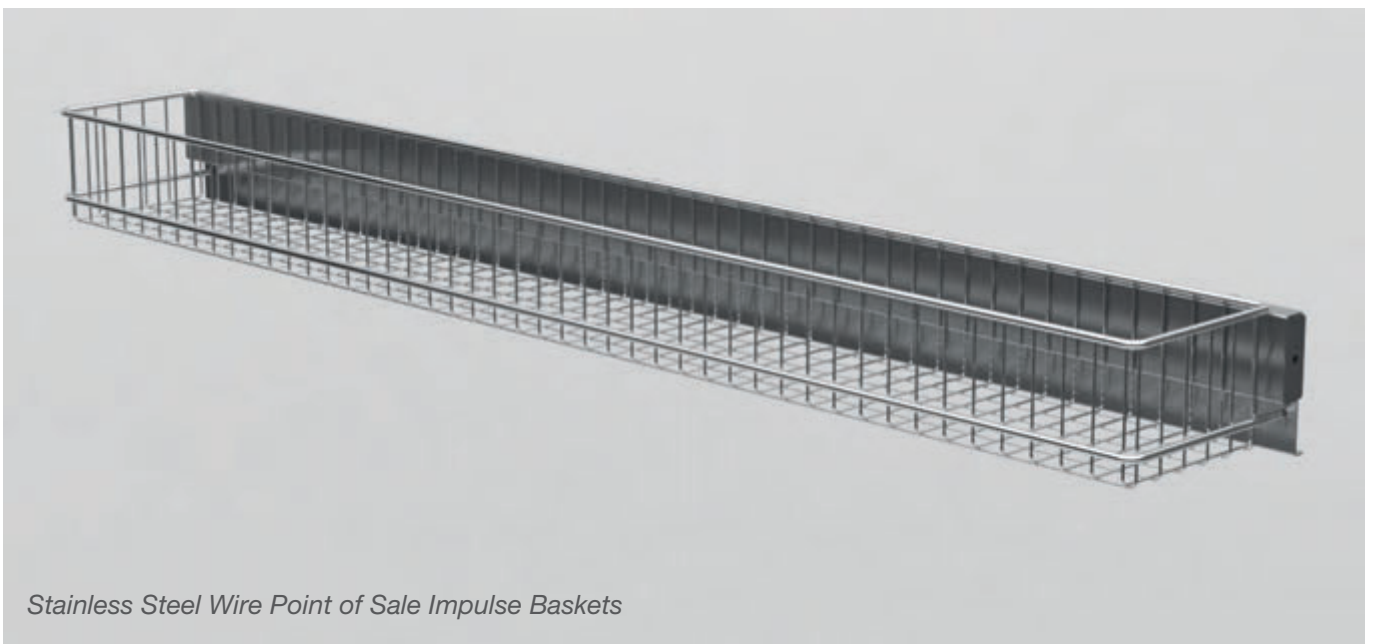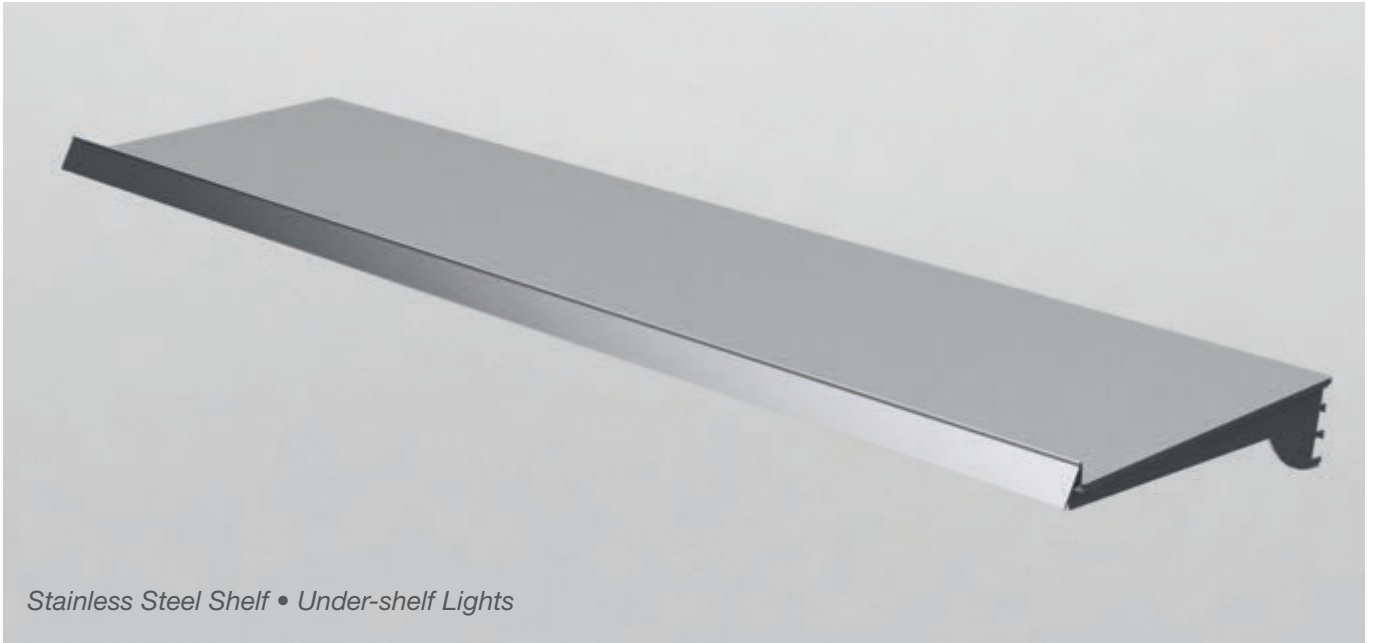

Optional extras

Description

---

Stainless Steel Display Shelf • Under-shelf Lights

---

Stainless Steel Wire Point of Sale Impulse Baskets

---

- We have a range of options available. Contact us for further details.

## University of London



Supporting Whitco Catering & Bakery Equipment.

Counterline manufactured and installed the cafe, servery counters and provided matching heated, chilled and beverage supporting equipment for various grab and go areas.

## WAKA



The four metres of Chilled display with a matching 1.5 metre of hot holding equipment was specified by Rees Associates for Waka.

At Waka over 500 freshly made Peruvian-Japanese hot and cold dishes including hot bowl, sushi & ceviche are created for food on the go everyday.



## Roundhay High School



The study zone cafe at Roundhay High School was created to support the sixth form students.

The students are able to work individually or collaboratively in a café-style setting with a wide variety of hot and cold food and drinks being readily available.

## Standard technical specifications

### All Displays

General construction from 304 and 430 grade polished stainless steel.

All glass 6mm toughened.

Full internal fuse protection.

### Chilled Displays

Chilled by recirculated cold air using fan blown evaporator.

Integral condensing unit and automatic condensate evaporator.

Resettable high pressure safety switch.

Digital electronic temperature control.

Product temperature 3-5°C in 25°C ambient at 50% relative humidity.

### Heated Displays

Product temperature maintained at 63 - 72°C in 20°C ambient.

### Power Supplies

All units are supplied with a 3.5m lead suitable for use with a 220/240volt supply.

**We strongly recommend that the supply is protected by a suitably rated residual current protection device.**

### Wattage

icapacity (chilled) display units range from 2.2 kw to 3.0 kw.

icapacity (heated) display units range from 2.5 kw to 4.0 kw.

We strongly recommend the purchase of export packing cases for goods exported outside of mainland UK.




## Optional extras

### All Displays

Export packing case

- All visuals are for illustrative purposes only and may not reflect the basic specification.
- Counterline reserves the right to alter the price and specification of the range at any time.
- All orders are accepted subject to Counterline's standard terms and conditions which are available from our website or our sales team.
- All prices exclude VAT which will be charged at the prevailing rate.
- It is strongly recommended that the installation instructions be referred to before producing designs to accommodate idesign displays.
- Refer to our website [www.counterline.co.uk](http://www.counterline.co.uk) for further options.

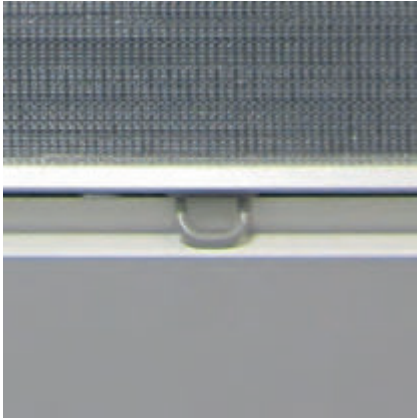

**Counterline Limited**  
 Randles Road  
 Knowsley Business Park  
 Merseyside  
 L34 9HZ  
 United Kingdom

**tel:** + 44 (0)151 548 2211  
**fax:** + 44 (0)151 549 2179  
**email:** enquiries@counterline.co.uk  
**web:** www.counterline.co.uk

**CE** All images, photographs, text, diagrams, brand names, logos and other artistic or literary works contained in this brochure (Intellectual Property Rights) are protected by copyright, database rights, design rights, registered designs, trade marks or service marks, trade names or know how (whether registered or not) and all rights or forms of protection of a similar nature anywhere in the world including any applications for any of the foregoing.

All Intellectual Property Rights in this brochure or appearing on our website or promotional material are owned by or licensed to Counterline Limited, and may not be reproduced or copied without permission.

**Terms & Conditions / Warranty**

Full details of Counterline's Terms & Conditions and icapacity 24 months warranty in the UK are available on request.