

integrale • chilled display multideck





Image: IC3ASMD4-GO





| Stock Code | Capacity (gn) | Overall Size (mm) | Weight (kg) | Wattage (kw) |
|---------------------------------|---------------|-------------------|-------------|--------------|
| Chilled 2 tier multideck | | | | |
| IC2ASMD2-GO | 2/1 | 825 x 660 x 533h | 110 | 2.4 |
| IC2ASMD3-GO | 3/1 | 1175 x 660 x 533h | 144 | 2.5 |
| IC2ASMD4-GO | 4/1 | 1525 x 660 x 533h | 180 | 2.7 |
| Chilled 3 tier multideck | | | | |
| IC3ASMD2-GO | 2/1 | 825 x 660 x 693h | 144 | 2.4 |
| IC3ASMD3-GO | 3/1 | 1175 x 660 x 693h | 161 | 2.5 |
| IC3ASMD4-GO | 4/1 | 1525 x 660 x 693h | 204 | 2.7 |
| IC3ASMD5-GO | 5/1 | 1875 x 660 x 693h | 238 | 2.7 |
| Chilled 4 tier multideck | | | | |
| IC4ASMD2-GO | 2/1 | 825 x 660 x 853h | 155 | 2.4 |
| IC4ASMD3-GO | 3/1 | 1175 x 660 x 853h | 176 | 2.5 |
| IC4ASMD4-GO | 4/1 | 1525 x 660 x 853h | 219 | 2.7 |

- Chilled display multidecks are designed for self help service.
- Gentle flow of convected air maintains pre-chilled food at a safe regulated temperature.
- Double-glazed, full height side hinged doors included as standard.
- The angle of the display deck can be adjusted for enhanced presentation.
- Gantry mounted controller installed on operators side (GO) - Doors.
- The gantry controller can be installed on customer side (GC) - Fixed Back.

technical specifications

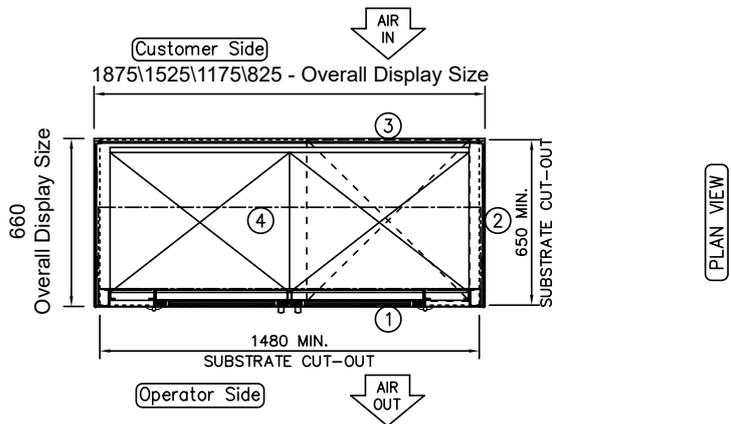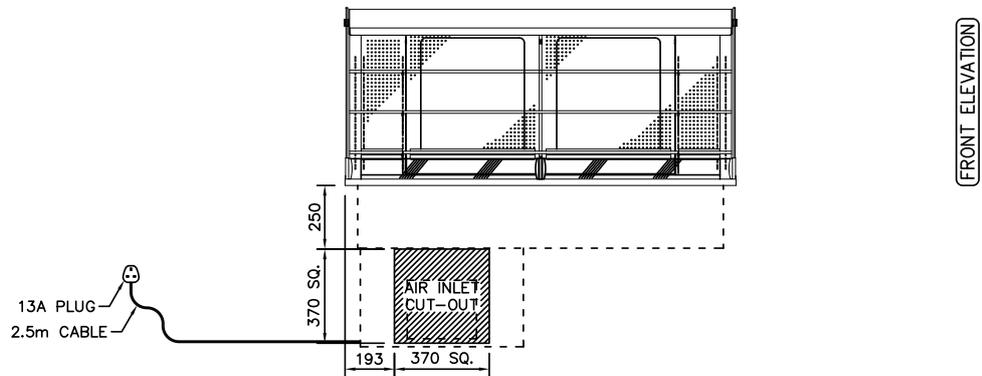

NOTE:
 IF DISPLAY IS TO BE FLUSH
 MOUNTED INTO WORKTOP,
 ADD 4 - 6mm TO DISPLAY
 SIZES FOR WORKTOP CUT-OUT

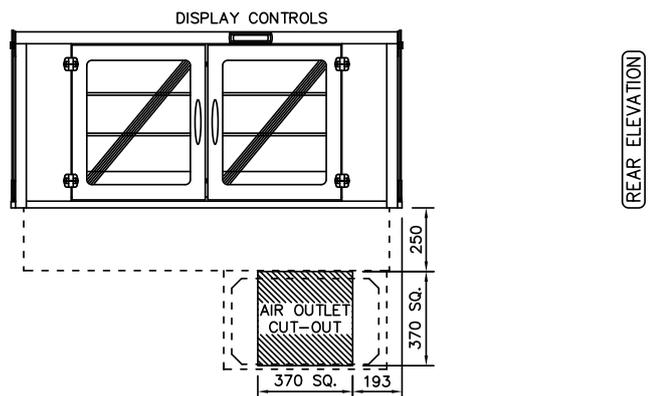

CUSTOMER & OPERATOR SIDE FASCIA
 PANELS MUST BE REMOVABLE FOR
 MAINTENANCE ACCESS

SUPPLIED WITH 400mm SQ. STAINLESS
 STEEL AIR INLET/OUTLET GRILLES