

## integrale • chilled display well





Image: ICW4-GO




Stock Code	Capacity (gn)	Overall Size (mm)	Weight (kg)	Wattage (kw)
ICW2-GO	2/1	825 x 660 x 535h	91	1.4
ICW3-GO	3/1	1175 x 660 x 535h	108	1.7
ICW4-GO	4/1	1525 x 660 x 535h	128	1.9
ICW5-GO	5/1	1875 x 660 x 535h	141	1.9
ICW6-GO	6/1	2330 x 660 x 535h	158	2.2


- Flat bed chilled well, which is perfect for the display of salads, drinks and fruit.
- Gentle flow of convected air maintains pre-chilled food at a safe regulated temperature.
- The angle of the display deck can be adjusted for enhanced presentation.
- Gantry mounted controller installed on operators side (GO) as standard.
- The gantry controller can be installed on customer side (GC) on request.
- A wide range of optional extras are available for this display.

technical specifications

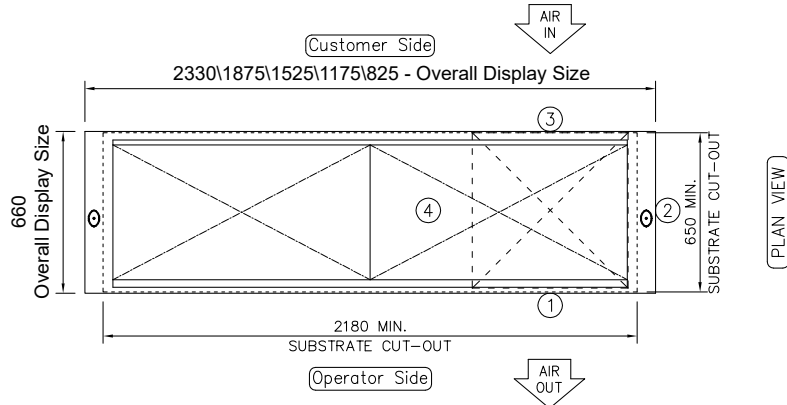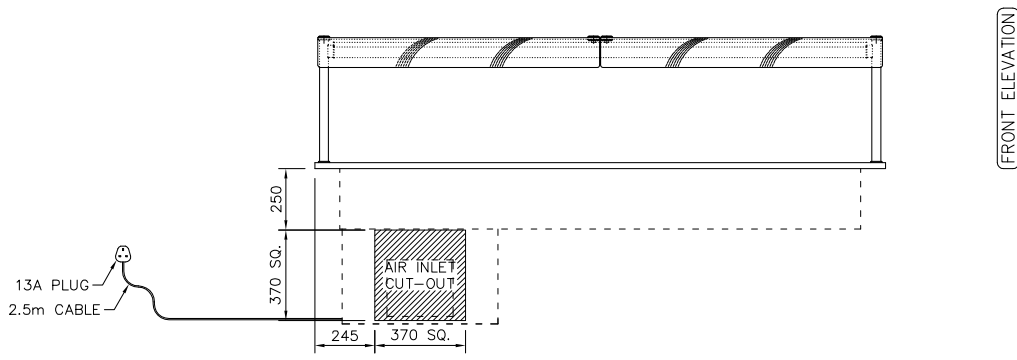

NOTE:  
 IF DISPLAY IS TO BE FLUSH  
 MOUNTED INTO WORKTOP,  
 ADD 4 – 6mm TO DISPLAY  
 SIZES FOR WORKTOP CUT-OUT

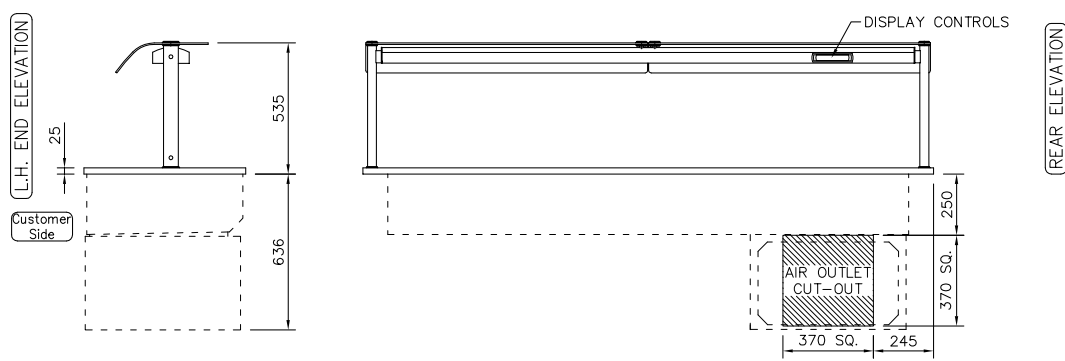

 CUSTOMER & OPERATOR SIDE FASCIA  
 PANELS MUST BE REMOVABLE FOR  
 MAINTENANCE ACCESS  
 SUPPLIED WITH 400mm SQ. STAINLESS  
 STEEL AIR INLET/OUTLET GRILLES