

Hot Cupboard






| Stock | Overall size | Weight | Wattage |
|--------|-------------------|--------|---------|
| Code | mm | kg | kw |
| IMHC9 | 942 x 693 x 569h | 30 | 2.5 |
| IMHC12 | 1242 x 693 x 569h | 40 | 2.5 |
| IMHC15 | 1542 x 693 x 569h | 50 | 2.5 |

- Roll under mobile hot cupboard.
- This unit maintains pre-heated cooked food at a regulated temperature.
- Includes mid shelf and sliding doors as standard.
- Supplied with 1500mm lead and 13amp plug top.





technical specifications




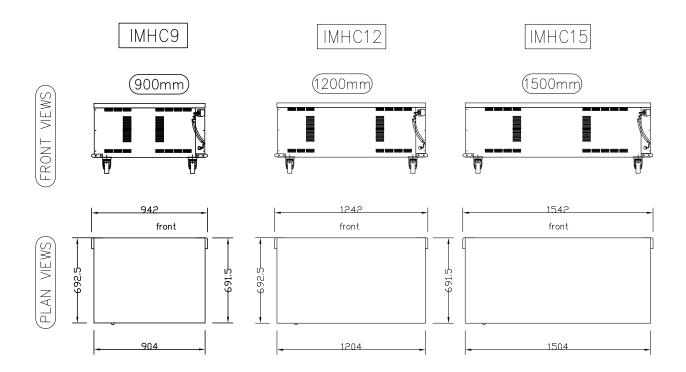















iDesign heated roll under hot cupboard. Comprises: — Hot air convected heated cupboard, sliding door access and fixed mid shelf.



NOTE: A minimum gap of 50mm must be allowed to both sides and to the back of the unit for air circulation to fans.