

enclosed chilled assisted service • freestanding

Image: VC900-GO



Image: SVC900-GO



Stock Code	Overall Size	Weight	Wattage	
			mm	kg
VC600-GO	600(w) x 750(d) x 1465(h)	138		1.5
VC900-GO	900(w) x 750(d) x 1465(h)	183		1.7
VC1200-GO	1200(w) x 750(d) x 1465(h)	233		2.0
VC1300-GO	1300(w) x 750(d) x 1465(h)	253		2.0
VC1800-GO	1800(w) x 770(d) x 1465 (h)	333		2.3

Hydraulic Gas Assisted Hinges

VCL600-GO	600(w) x 750(d) x 1465(h)	141		1.5
VCL900-GO	900(w) x 750(d) x 1465(h)	186		1.7
VCL1200-GO	1200(w) x 750(d) x 1465(h)	236		2.0
VCL1300-GO	1300(w) x 750(d) x 1465(h)	262		2.0

Stock Code	Overall Size	Weight	Wattage	
			mm	kg
SVC600-GO	600(w) x 750(d) x 1470(h)	144		1.5
SVC900-GO	900(w) x 750(d) x 1470(h)	191		1.7
SVC1200-GO	1200(w) x 750(d) x 1470(h)	243		2.0
SVC1500-GO	1500(w) x 770(d) x 1470(h)	298		2.3
SVC1800-GO	1800(w) x 770(d) x 1470(h)	349		2.3
SVC2100-GO	2100(w) x 770(d) x 1470(h)	402		2.8

Hydraulic Gas Assisted Hinges

SVCL600-GO	600(w) x 750(d) x 1470(h)	147		1.5
SVCL900-GO	900(w) x 750(d) x 1470(h)	194		1.7
SVCL1200-GO	1200(w) x 750(d) x 1470(h)	246		2.0

- These displays maintains pre-chilled food & drink at a regulated temperature of 0° - 5° degrees.
- Closed front assisted service, to four levels of display.
- Ideal for sandwiches, filled rolls, baguettes, salad, pasta, dairy products, cream cakes, smoothies, bottled, canned and carton drinks.
- Internal shelving adjustable in height and angle for improved product visibility.
- Low Energy LED illumination to all levels.
- Toughened glass canopy and sneeze screen.
- Zero Emission Eco Friendly Hydrocarbon Refrigeration housed within.
- Automatic condensate evaporator complete with ECO water level sensor.
- Reducing energy costs further with double glazed doors to rear as standard.
- Conforms to ISO 23953 standard, CE.
- 2 non-braked and 2 braked castor's below with foot option available.
- Curved profile design matches Counterlines Integrale & Da Vinci ranges of Patisseries, Dole Wells, Multidecks, Bain Maries and Hotplates.
- Square profile design matches Counterlines Manhattan range of Patisseries, Wells, Multidecks, Bain Maries and Hotplates.
- Allowing 24 hour operation.
- 3.5m supply lead with 13A plug as standard.


optional extras



- Airflow direction kits.
- Security Features.
- Fascia panels.
- Point of Sale - Ticket Strip Holders.
- Hydraulic gas assisted hinges for Lift Up Glass versions.
- Wire impulse baskets.
- Custom specific branding & design adjustments.
- Castor Alternative (Height reducing feet).
- Control alternatives & monitoring system compatibility.
- Slimline Version (660mm) available upon request.

technical specifications

Square Form Factor

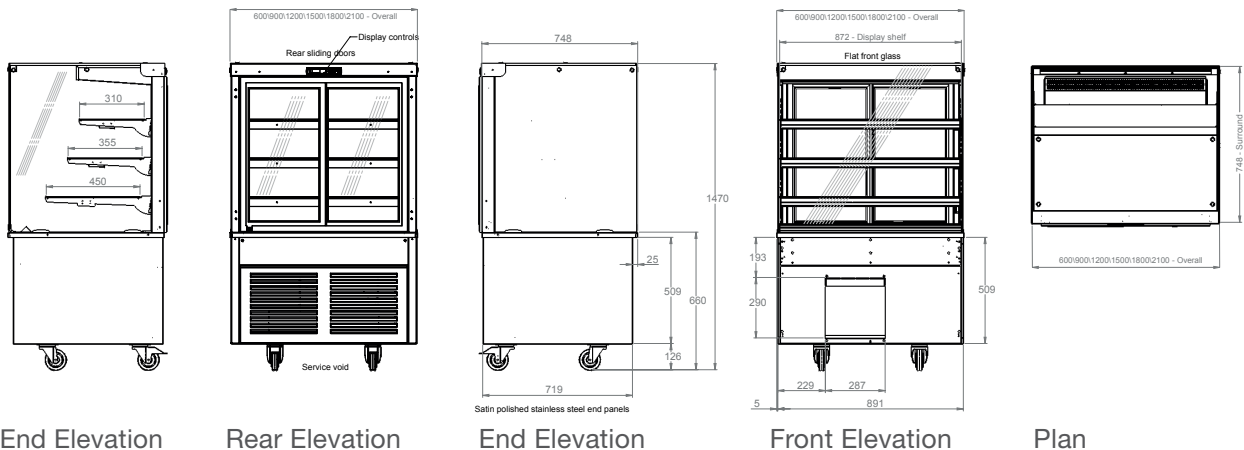

Curved Form Factor

