

enclosed chilled assisted service • freestanding    



Stock Code	Overall Size mm	Weight kg	Wattage	
			mm	kw
VCL600-GO	600(w) x 750(d) x 1465(h)	141	1.5	
VCL900-GO	900(w) x 750(d) x 1465(h)	186	1.7	
VCL1200-GO	1200(w) x 750(d) x 1465(h)	236	2.0	
VCL1300-GO	1300(w) x 750(d) x 1465(h)	262	2.0	

Stock Code	Overall Size mm	Weight kg	Wattage	
			mm	kw
SVCL600-GO	600(w) x 750(d) x 1470(h)	147	1.5	
SVCL900-GO	900(w) x 750(d) x 1470(h)	194	1.7	
SVCL1200-GO	1200(w) x 750(d) x 1470(h)	246	2.0	

## hydraulic gas assisted hinge models

- Fully enclosed display maintains food at a regulated temperature.
- Ideal for sandwiches, filled rolls, dairy products, drinks etc.
- Three glass shelves with LED illumination to all shelf levels.
- Castors included as standard which give an overall height of 1465mm.
- Adjustable low level feet reducing overall height to 1400mm available as an optional extra.
- Integral fan blown refrigeration system.
- Front glass lift panel with hydraulic gas assisted hinges.
- Eye level electronic controller installed on operators side (GO) with rear doors.


## optional extras



- Airflow direction kits.
- Security Features.
- Fascia panels.
- Point of Sale - Ticket Strip Holders.
- Hydraulic gas assisted hinges for Lift Up Glass versions.
- Wire impulse baskets.
- Custom specific branding & design adjustments.
- Castor Alternative (Height reducing feet).
- Control alternatives & monitoring system compatibility.
- Slimline Version (660mm) available upon request.

## technical specifications

### Square Form Factor

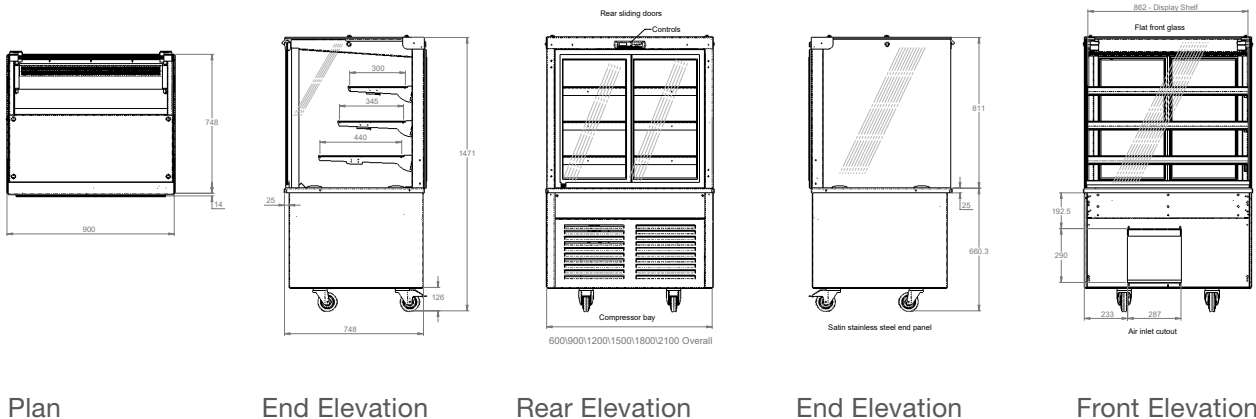

Plan


End Elevation

Rear Elevation

End Elevation

Front Elevation

### Curved Form Factor

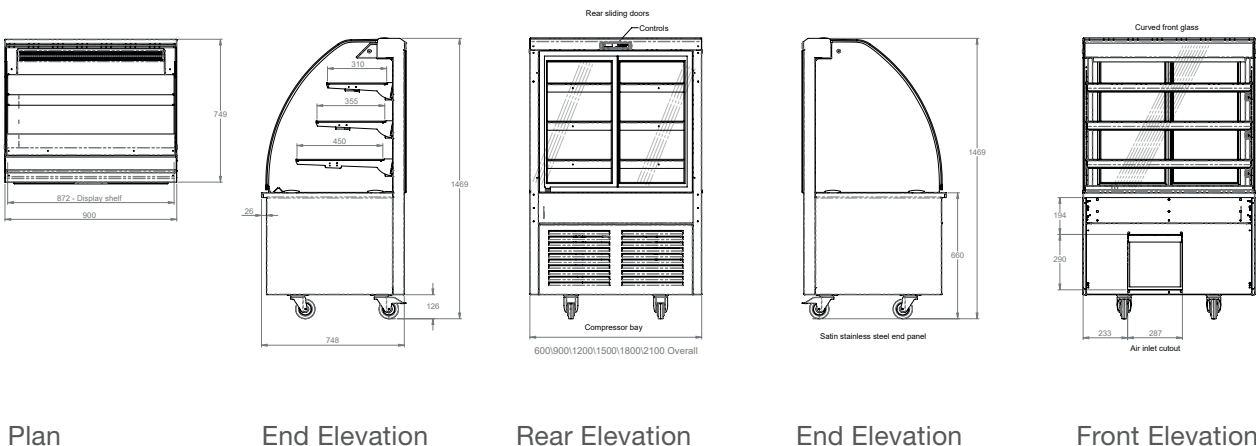

Plan

End Elevation

Rear Elevation

End Elevation

Front Elevation