


HP SERIES

HOTPLATE | PREMIUM HEATED BUFFET PRESENTATION

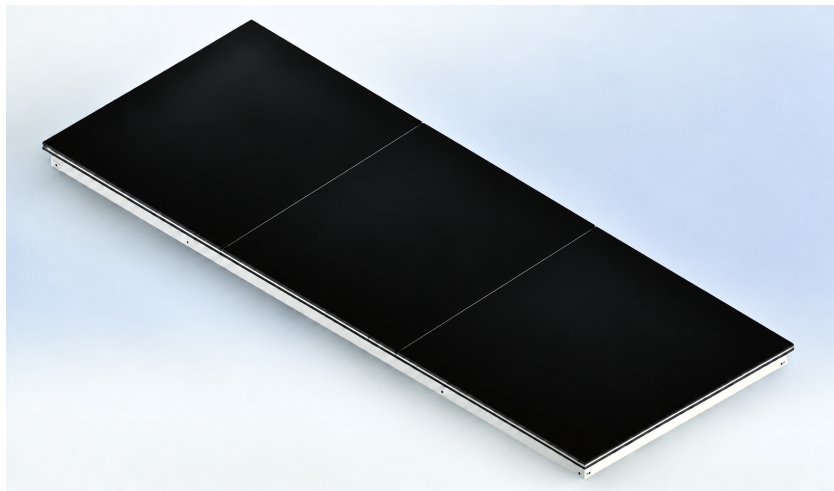

HP3 / 3/1 GN - representative image adapted from FTHP photograph

HOT SERVICE. SEAMLESS STYLE.

Present hot buffet dishes on a dedicated, flush-fitting heated surface. The HP Series combines digital hotplate control, a shallow body and a clean architectural finish for premium buffet environments. Three sizes provide practical flexibility for counter layouts.

65-90°C

HOLDING TEMPERATURE

2/1 - 4/1 GN

THREE SIZES

SPECIFICATIONS

Model / GN	Surface L x D (mm)	Hot kW
HP2 / 2/1	697 x 546	0.50
HP3 / 3/1	1047 x 546	1.00
HP4 / 4/1	1397 x 546	1.00

Supply: 220/240 V, 13 A (HP2 / HP4 drawings).

HP3 power rating: 1.00 kW.

Holding temperature: 65-90°C.

SURFACE & MOUNTING OPTIONS

Ceran glass as standard. Dekton and stainless steel available; stainless steel option for under-counter mounting.

COUNTERLINE / HP SERIES

Counterline HP Series

**HOT SERVICE.
A SEAMLESS COUNTER.**

DEDICATED HOT PRESENTATION

A purpose-built heated surface for hot buffet dishes, with three GN formats to suit your service layout.

FLUSH FIT. PREMIUM FINISH.

Frameless fitting creates a seamless transition between display surface and counter. Choose Ceran glass, Dekton or stainless steel.

CONTROL YOU CAN SEE

A digital hot controller and separate on/off switch provide a clear, straightforward control arrangement.

SPACE BELOW THE SURFACE

A shallow 53 mm body helps preserve valuable space beneath the counter. Levelling brackets support installation adjustment.

BUILT FOR COMMERCIAL LIFE

Satin-polished stainless-steel construction and UK manufacture support a durable, practical buffet solution.

COMPLETE THE PRESENTATION

Optional heated and illuminated gantries; square or curved sneeze guards. Coordinate the hotplate with the wider Counterline buffet range.


HP SERIES

DIMENSIONS & INSTALLATION | TECHNICAL REFERENCE

CRISP DIMENSIONS. CLEAR ALLOCATION.

All dimensions in mm. Diagrams are schematic and not to scale. These dimensions apply to the supplied standard-unit drawings; confirm the selected surface and mounting configuration before manufacture of the counter.


HP2



SURFACE / PLAN

Worktop cut-out: 703 x 556
With brackets: 807 x 656


HP3

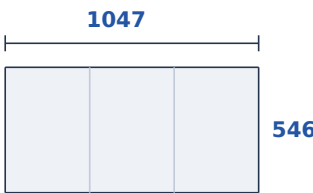

SURFACE / PLAN

Worktop cut-out: 1053 x 556
With brackets: 1153 x 652

HP4

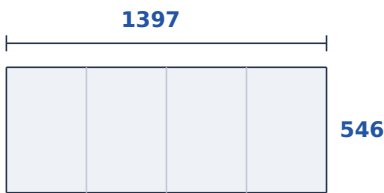

SURFACE / PLAN

Worktop cut-out: 1403 x 556
With brackets: 1507 x 656

MODEL DIMENSIONS & WEIGHTS

Model	Body L x D	Height	Bracket envelope	Weight*
HP2	666 x 515	53	807 x 656	22 kg
HP3	1016 x 515	53	1153 x 652	31 kg
HP4	1366 x 515	53	1507 x 656	38 kg

*HP3 drawing contains a technical table labelled HP4. HP3 power rating confirmed at 1.00 kW. Confirm HP3 weight and supply with engineering before customer release. Height refers to the body shown in elevation.

INSTALLATION DETAILS

Controls & connection
Controller fascia: 200 x 121; cut-out: 170 x 90. Fixing centres: 180 x 101. Controller depth: 72.5. Separate on/off switch and digital hot controller.

Surface junction
3 mm silicone gap / thermal break between the standard surface and stone worktop. Levelling detail shows 20 mm adjustment and 52 mm beneath substrate.

Installation & access
Allow access to the controller and electrical connections. Coordinate the support substrate and levelling brackets with the counter fabricator.

Surface & mounting selection
Ceran glass, Dekton and stainless steel options. Stainless steel available for under-counter mounting. Dimensions shown are for the supplied Ceran glass drawings; confirm variant-specific cut-outs before fabrication.

Drawing reference
HP2, HP3 and HP4; dated 06.07.26.